

Raccordi Fittings

Di distribuzione a "Y" in poliammide 5025

Polyamide "Y" distributor 5025



Raccordi di distribuzione realizzati in poliammide PA 6.6, consentono la realizzazione di derivazioni parallele con la possibilità di avere i tubi derivati di diametro differente dal tubo principale, mantenendo il grado di tenuta IP66/IP68/IP69K.

Distribution fittings made of polyamide PA 6.6, allow the realization of parallel branches with the possibility of having the branch conduits of different diameters from the main conduit, while maintaining the degree of sealing IP66/IP68/IP69K.

Colore
Nero

Colour
Black

Codici di riferimento
RQY-PA

Reference code
RQY-PA



UL 1696 CSA22.2
File n.E86359



DIN 5510-2 (S1)



NF F 16-101/102
(I3/F2)




EN 45545-2:2013
HL2



CODICE IP68/IP69K IP68/IP69K CODE	DIMENSIONI, mm DIMENSIONS, mm		DIMENSIONI, mm DIMENSIONS, mm						CONFEZIONE PACKAGE	
	DN1 ø	DN2 ø	B1	B2	D	C	ø F	E	kg/100pz	pz pcs
5025-101013NPA	13	2 x 10,0	20	17	68	36	2 x 5,5	19	1,60	10
5025-131313NPA	13	2 x 13,0	20	20	70	42	2 x 5,5	20	1,80	10
5025-131316NPA	15,8	2 x 13,0	23	20	71	42	2 x 5,5	22	2,00	10
5025-161616NPA	15,8	2 x 15,8	23	23	80	48	2 x 5,5	23	2,20	10
5025-161621NPA	21,2	2 x 15,8	29,5	23	87,5	51	2 x 5,5	27	3,46	10
5025-212128NPA	28,5	2 x 21,2	37	29,5	99	62,5	2 x 6,5	37	5,50	10
5025-282834NPA	34,5	2 x 28,5	44	37	106	77,5	2 x 6,5	43	7,54	10
5025-343442NPA	42,5	2 x 34,5	52	44	125	98	2 x 6,5	45	12,0	10
5025-424254NPA	54,5	2 x 42,5	64	52	129,5	110	2 x 6,5	62	17,34	5

Di distribuzione a "Y" in TPE 5025

TPE "Y" distributor 5025

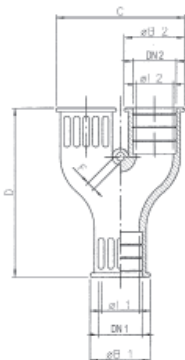

Prodotti in TPE, il collegamento raccordo - tubo flessibile si ottiene spingendo il tubo all'interno del raccordo.

La particolare conformazione interna del raccordo, incuneandosi tra le ondulazioni del tubo, provoca il bloccaggio dell'accoppiamento mentre l'elasticità del materiale consente di ottenere una tenuta IP66.

Produced in TPE. The connection fitting - conduit is obtained by simply pushing the conduit into the fitting. The particular internal shape of the fitting, wedging itself between the undulations of the conduit, causes the locking of the coupling, while the elasticity of the material permits to obtain an IP66 sealing.

Colore
Nero

Colour
Black

Codice di riferimento
RQY

Reference code
RQY



CODICE IP66 IP66 CODE	DIMENSIONI, mm DIMENSIONS, mm		DIMENSIONI, mm DIMENSIONS, mm						CONFEZIONE PACKAGE	
	DN1 ø	DN2 ø	B1	B2	D	C	ø F	E	kg/100pz	pz pcs
5025-101010N	10	2 x 10,0	17,5	17,5	54,5	36,5	1 x 4,0	19	0,63	10
5025-161621N	21,2	2 x 15,8	29,5	25	75	52	1 x 4,0	20	2,60	10
5025-161628N	28,5	2 x 15,8	36,5	25	75	52	1 x 4,0	22	2,80	10
5025-181818N	18,5	2 x 18,5	26,5	26,5	81	54,5	1 x 4,0	23	2,20	10
5025-212121N	21,2	2 x 21,2	29,5	29,5	82,5	62,5	1 x 4,0	27	2,90	10
5025-212128N	28,5	2 x 21,2	36,5	29,5	81,5	60,5	1 x 4,0	37	3,50	10
5025-282834N	34,5	2 x 28,5	42,5	36,5	86	77	1 x 4,0	43	5,20	10
5025-343442N	42,5	2 x 34,5	52,5	42,5	98,5	89	1 x 4,0	45	6,50	10
5025-424254N	54,5	2 x 42,5	65	52,5	116	109,5	1 x 4,0	62	11,6	5