


# Raccordi ad innesto rapido in poliammide

## Quick-coupler connectors in polyamide

### Diritti filetto femmina 5112 / 5110

### Straight plastic female thread 5112 / 5110

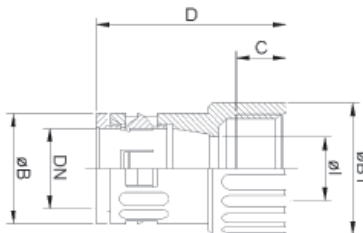

#### Filettature

- Metrico ISO conforme CEI EN 60423
- PG secondo DIN 40430.

#### Colori

Nero

#### Codici di riferimento

RQG3 IP66

RQG2 IP68/IP69K

#### Threads

- ISO metric compliant IEC EN 60423
- PG in accordance with DIN 40430.


#### Colour

Black

#### Reference code

RQG3 IP66

RQG2 IP68/IP69K



#### Filettatura Metrica Metric thread

CODICE IP66 IP66 CODE	CODICE IP68/IP69K IP68/IP69K CODE	DN ø	ø F	ø l	DIMENSIONI, mm DIMENSIONS, mm		C	D	CH	kg/100pz	CONFEZIONE PACKAGE m
					ø B	ø B1					
-	5112-07125N67	10	M 12 x 1,5	7,5	17	17	9,5	36,5	16	0,45	50
5112-10125N	5112-10125N67	13	M 12 x 1,5	10	20	23	9,5	34,5	18	0,55	50
5112-1016N	5112-1016N67	13	M 16 x 1,5	10	20	21	9,5	36,5	18	0,64	50
5112-1216N	5112-1216N67	15,8	M 16 x 1,5	12,5	23	21	9,5	39	21	0,76	50
5112-1720N	5112-1720N67	21,2	M 20 x 1,5	16,5	29,5	24	12,5	49	27	1,26	50
5112-2325N	5112-2325N67	28,5	M 25 x 1,5	17	37	30	13,5	54	34	1,40	25
5112-2932N	5112-2932N67	34,5	M 32 x 1,5	24	44	35	15	55,5	40	2,20	10
5112-3640N	5112-3640N67	42,5	M 40 x 1,5	33	58	44,5	20	65	55	2,80	10
-	5112-4850N67	54,5	M 50 x 1,5	48,5	68	54,5	20	86,5	65	4,30	10
-	5112-4863N67	54,5	M 63 x 1,5	48,5	68	69	25	91	65	7,00	10

#### RQG3 IP66

UL 1696 CSA22.2  
File n.E86359  
DN 13- 54,5



EN/IEC 61386-23



#### RQG2 IP68/69K

UL 1696 CSA22.2  
File n.E86359  
DN 13- 54,5



DIN 5510-2 (S1)



EN/IEC 61386-23



NF F 16-101/102  
(I3/F2)



EN 45545-2



#### Filettatura PG PG thread

CODICE IP68/IP69K IP68/IP69K CODE	DN ø	ø F	ø l	DIMENSIONI, mm DIMENSIONS, mm		C	D	CH	kg/100pz	CONFEZIONE PACKAGE m
				ø B	ø B1					
5110-1009N67	13	9	10	20,5	21	11,5	33,5	18	0,68	50
5110-1211N67	15,8	11	12,5	23	23	15	39,5	21	1,00	50
5110-1716N67	21,2	16	17	29,5	27,5	16	45	27	1,38	50
5110-2321N67	28,5	21	23,5	37	33,5	22	49	34	2,04	25
5110-2929N67	34,5	29	30,5	44	41	18	52	40	2,60	10
5110-3636N67	42,5	36	36,5	52/58	63/52	20	69/91	49/55	6,80	10
5110-4848N67	54,5	48	45,0	68	64	16	90	65	9,20	10