


■ Raccordi metallici per tubi flessibili in poliammide Metal connectors for flexible conduits in polyamide

Maschio girevole a doppio bloccaggio 6012PAT-G Double locking male swivel 6012PAT-G

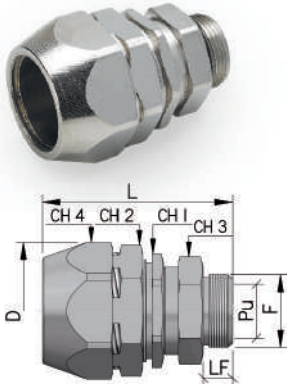


IP66
IP68

-40°C +150°C

Filettatura Metrica Metric thread

CODICE CODE	DIMENSIONI, mm DIMENSIONS, mm											
	ø DN	ø F	PU	CH1	CH2	CH3	CH4	LF	L	D	kg/pz	Conf/pz
6012PAT-1216G	15,8	M16x1,5	9	22	26	22	28	10	61,0	31	0,137	10
6012PAT-1720G	21,2	M20x1,5	15	28	30	26	35	10	61,0	39	0,196	10
6012PAT-2325G	28,5	M25x1,5	20	35	40	32	42	10	64,0	47	0,295	10
6012PAT-2932G	34,5	M32x1,5	27	42	50	39	50	13	71,5	56	0,455	10
6012PAT-3640G	42,5	M40x1,5	32	55	60	50	60	14	74,0	64	0,636	5
6012PAT-4850G	54,5	M50x1,5	44	65	70	65	70	18	86,0	76	1,000	1

Maschio fisso a doppio bloccaggio 6012PAT Double locking male fixed 6012PAT

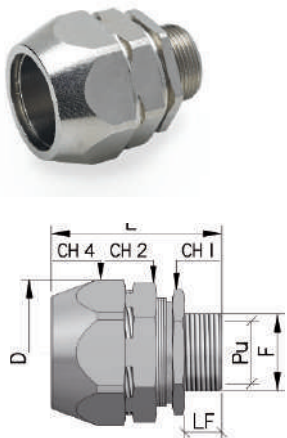


IP66
IP68

-40°C +150°C

Filettatura Metrica Metric thread

CODICE CODE	DIMENSIONI, mm DIMENSIONS, mm											
	ø DN	ø F	PU	CH1	CH2	CH4	LF	L	D	kg/pz	Conf/pz	
6012PAT-1216	15,8	M16x1,5	12	22	26	28	9	42,0	31	0,092	30	
6012PAT-1720	21,2	M20x1,5	15	28	30	35	10	61,0	39	0,161	20	
6012PAT-2325	28,5	M25x1,5	20	35	40	42	10	64,0	47	0,237	20	
6012PAT-2932	34,5	M32x1,5	27	42	50	50	13	71,5	56	0,380	10	
6012PAT-3640	42,5	M40x1,5	32	55	60	60	14	74,0	64	0,484	7	
6012PAT-4850	54,5	M50x1,5	44	65	70	70	18	86,0	76	0,770	5	

Tubo rigido - tubo flessibile a doppio bloccaggio 6117PAT Double locking metal rigid conduit - flexible conduit 6117PAT

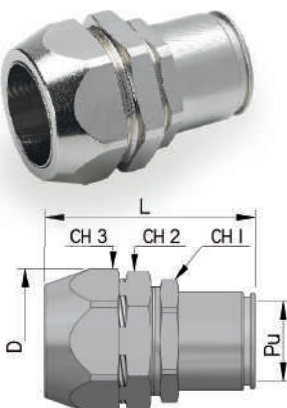

IP66
IP68

-40°C +150°C

Filettatura Metrica Metric thread

CODICE CODE	TUBO FLESSIBILE FLEXIBLE CONDUIT	TUBO METALLICO METAL CONDUIT	DIMENSIONI DIMENSIONS								
	ø DN	ø D	PU	CH1	CH2	CH3	D	L	kg/pz	Conf/pz	
6117PAT-1720	21,2	20	15,0	28	30	35	39	65,0	0,17	10	
6117PAT-2325	28,5	25	21,5	35	39	42	47	68,0	0,25	10	
6117PAT-2932	34,5	32	27,0	42	50	50	56	77,0	0,45	10	
6117PAT-3640	42,5	40	35,0	50	55	60	64	82,5	0,60	5	
6117PAT-4850	54,5	50	46,5	65	70	70	76	81,0	0,79	1	