


# Guaina metallica

## Pliable conduit

### Ricoperta in PVC aspirato 6071

### Coated in vacuum PVC 6071

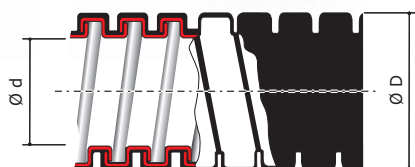

Tubi pieghevoli in acciaio zincato a caldo con metodo Sendzimir (UNI EN 10346) ricoperti in PVC aspirato non propagante la fiamma.


Resistenti ai più comuni oli e grassi, presentano ottima flessibilità e buona resistenza meccanica. Continuità elettrica garantita. Disponibile in Grigio scuro e Nero a richiesta.

- Standard CEI EN 61386-1 e 61386-22
- Classificazione CEI EN 61386 **3 4 3 1**
- Grado IP CEI EN 60529 **IP44**  
**IP66/IP68/IP69 con accessorio 66BTP**
- Resistenza alla compressione  
DN10÷DN27 **1250 N**  
DN35÷DN51 **750 N**
- Resistenza all'urto **6 J**
- Resistenza alla trazione  
DN10÷DN16 **500 N**  
DN21÷DN51 **1000 N**
- Resistenza al carico sospeso **450 N**

Pliable conduits made of Sendzimir hot galvanized steel (UNI EN 10346), covered in flame retardant vacuum PVC.

Resistant to most common oils and greases, they are extremely flexible and have excellent levels of mechanical resistance. Electrical continuity guaranteed. Available in dark Grey and Black on request.

- Standard IEC EN 61386-1 and 61386-22
- Classification IEC EN 61386 **3 4 3 1**
- IP degree IEC EN 60529 **IP44**  
**IP66/IP68/IP69 with accessory 66BTP**
- Compressive strength  
DN10÷DN27 **1250 N**  
DN35÷DN51 **750 N**
- Impact resistance **6 J**
- Tensile strength  
DN10÷DN16 **500 N**  
DN21÷DN51 **1000 N**
- Resistance to suspended load **450 N**



#### Aggraffatura semplice

#### Simple interlocking



CODICE GRIGIO CODE GRAY	CODICE NERO CODE BLACK	DIAMETRO NOMINALE NOMINAL DIAMETER	DIAMETRO INTERNO INTERNAL DIAMETER mm	DIAMETRO ESTERNO EXTERNAL DIAMETER mm	RAGGIO CURVA RADIUS CURVE mm	CONFEZIONE PACKAGE m
6071-010	6071-010N*	10	10,0	14,0	30	50
6071-012	6071-012N*	12	12,0	16,0	35	50
6071-015	6071-015N*	16	15,5	19,5	40	50

\*A richiesta/On request

#### Aggraffatura rinforzata

#### Reinforced interlocking



CODICE GRIGIO CODE GRAY	CODICE NERO CODE BLACK	DIAMETRO NOMINALE NOMINAL DIAMETER	DIAMETRO INTERNO INTERNAL DIAMETER mm	DIAMETRO ESTERNO EXTERNAL DIAMETER mm	RAGGIO CURVA RADIUS CURVE mm	CONFEZIONE PACKAGE m
6071-020	6071-020N*	21	20,5	25,5	60	50
6071-027	6071-027N*	27	26,5	31,5	80	25
6071-035	6071-035N*	35	35,0	41,0	120	25
6071-040	6071-040N*	40	40,0	46,0	150	25
6071-050	6071-050N*	51	50,5	56,0	200	25

\*A richiesta/On request

CEI EN 61386



CEI EN 61386



#### Accessori correlati Related accessories

Per For  
IP66/IP68/IP69



66BTP

6014

6014-G

6014XX

6014-P

6015

6115

6024

6025

6117

6117XX

pag.74

pag. 56

pag. 58

pag. 61

pag. 63

pag. 60

pag. 64

pag.65

pag. 84

pag. 87