
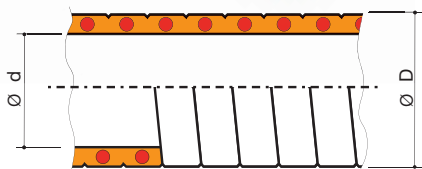


■ Guaina Flexible conduit

In PVC spiralato pesante (V0 UL94) 6079

Heavy helical PVC (V0 UL94) 6079

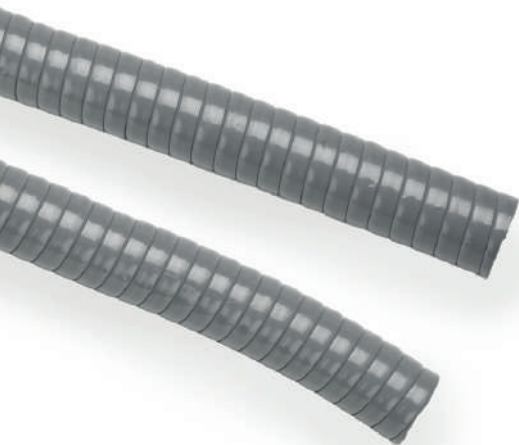

Tubi flessibili prodotti in PVC plastificato ad alto spessore non propaganti la fiamma, rinforzati con spirale in PVC rigido antiurto. Resistenti ai più comuni oli, grassi ed acidi diluiti, presentano buona resistenza meccanica ed all'invecchiamento. Superfici interne ed esterne lisce.

Colore Grigio RAL 7001

- Standard
CEI EN 61386-1, CEI EN 61386-23
- Classificazione CEI EN 61386 **2 3 1 1**
- Grado IP CEI EN 60529 **IP65**
- Resistenza alla compressione **320 N**
- Resistenza all'urto **2 J**
- Autoestinguenza **UL94 V0**

Extra thick, plasticized PVC flexible conduits, reinforced with rigid, fire retardant and impact-resistant helical PVC.

Resistant to most oils, greases and diluted acids and in particular to ageing. Smooth internal and external surfaces.

Colour Grey RAL 7011

- Standard
IEC EN 61386-1 and IEC EN 61386-23
- Classification IEC EN 61386 **2 3 1 1**
- IP degree IEC EN 60529 **IP65**
- Compressive strength **320 N**
- Impact resistance **2 J**
- Self-extinguishing **UL94 V0**

CODICE GRIGIO CODE GRAY	DIAMETRO NOMINALE NOMINAL DIAMETER	DIAMETRO INTERNO INTERNAL DIAMETER mm	DIAMETRO ESTERNO EXTERNAL DIAMETER mm	RAGGIO CURVA RADIUS CURVE	CONFEZIONE PACKAGE m
6079-10B	10	10	14,0	40	30
6079-12B	12	12	16,4	55	30
6079-16B	16	16	20,7	70	30
6079-20B	20	20	24,7	80	30
6079-28B	27	28	33,5	90	30
6079-35B	35	35	41,0	120	30
6079-40B	40	40	46,4	140	30
6079-50B	50	50	57,2	160	30

Accessori correlati Related accessories



6188

pag. 70