
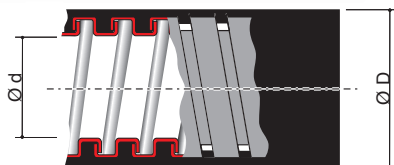


Guaina metallica Pliable conduit

Ricoperta in EVA liscio 607E Coated in smooth EVA 607E

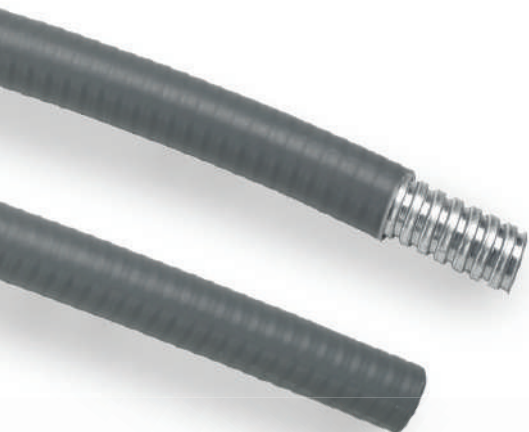


Tubi pieghevoli in nastro di acciaio zincato Sendzimir (UNI EN 10346).
Il rivestimento è realizzato in EVA, termoplastico non propagante la fiamma, a bassa emissione di gas tossici e corrosivi, privo di alogeni, con superficie esterna liscia ed ancoraggio sulle spire.
Resistenti ai più comuni oli e grassi, presentano buona flessibilità e buona resistenza meccanica.
Continuità elettrica garantita
Colore grigio e nero a richiesta

Pliable conduits made of Sendzimir galvanized steel (UNI EN 10346).
The coating is made of thermoplastic, flame retardant EVA, with a low level of toxic and corrosive gas emission, halogen-free, with a smooth external surface and thread fastening.
Resistant to most common oils and greases, they are extremely flexible and have excellent levels of mechanical resistance.
Electrical continuity guaranteed
Colour grey and black on request

- Standard
CEI EN 61386-1, CEI EN 61386-2, UNI CEI EN 45545-2
- Classificazione CEI EN 61386 **3 4 4 1**
- Grado IP CEI EN 60529 **IP66/IP68/IP69**
- Resistenza alla compressione
DN10÷DN27 **1250N**
DN35÷DN51 **750 N**
- Resistenza all'urto **6 J**
- Resistenza alla trazione
DN10÷DN16 **500N**
DN21÷DN51 **1000 N**
- Resistenza al carico sospeso **450 N**

- Standard
IEC EN 61386-1 and 61386-2, UNI IEC EN 45545-2
- Classificazione IEC EN 61386 **3 4 4 1**
- IP degree IEC EN 60529 **IP66/IP68/IP69**
- Compressive strength
DN10÷DN27 **1250N**
DN35÷DN51 **750 N**
- Impact resistance **6 J**
- Tensile strength
DN10÷DN16 **500N**
DN21÷DN51 **1000 N**
- Resistance to suspended load **450 N**



HF
Halogen
FREE

Aggraffatura semplice Simple interlocking



CODICE GRIGIO CODE GRAY	CODICE NERO CODE BLACK	DIAM. NOMINALE NOMINAL DIAM.	DIAM. INTERNO INTERNAL DIAM. mm	DIAM. ESTERNO EXTERNAL DIAM. mm	RAGGIO CURVA RADIUS CURVE	CONFEZIONE PACKAGE m
607E010	607E010N*	10	10,0	15,0	60	50
607E012	607E012N*	12	12,0	18,0	70	50
607E016	607E016N*	16	15,5	21,0	90	50

Aggraffatura rinforzata Reinforced interlocking



CODICE GRIGIO CODE GRAY	CODICE NERO CODE BLACK	DIAM. NOMINALE NOMINAL DIAM.	DIAM. INTERNO INTERNAL DIAM. mm	DIAM. ESTERNO EXTERNAL DIAM. mm	RAGGIO CURVA RADIUS CURVE	CONFEZIONE PACKAGE m
607E022	607E022N*	21	20,5	27,0	120	25
607E032	607E032N*	27	26,5	34,0	140	25
607E038	607E038N*	35	35,0	43,0	190	25
607E040	607E040N*	40	40,0	48,0	240	25
607E050	607E050N*	51	50,5	58,5	300	25
607E010R**	-	10	10,0	15,0	70	50
607E012R**	-	12	12,0	18,0	80	50
607E016R**	-	16	15,5	21,0	100	50

*A richiesta/On request
** Resistenza alla trazione 1000N e a richiesta
** 1000N Tensile strength and on request

Accessori correlati Related accessories

6014	6014-G	6014XX	6014-P	6015	6115	6024	6025	6117	6117XX
pag. 56	pag. 58	pag. 61	pag. 63	pag. 60	pag. 64	pag. 65	pag. 84	pag. 87	