


■ Guaina metallica Flexible conduit

Protetta con treccia in acciaio zincato 607T Protected with galvanised steel braided 607T

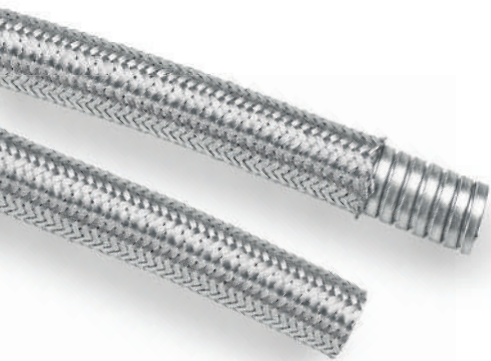

Tubi flessibili in acciaio zincato a caldo con metodo Sendzimir (UNI EN 10346). Sono ricoperti da una treccia in acciaio zincato. Presentano ottima flessibilità e buona resistenza meccanica, offrono una buona protezione dalle interferenze elettromagnetiche.

Sono impiegati per applicazioni industriali dove è necessaria un'alta resistenza termica, con raccordi TN il sistema è privo di materie plastiche.

Continuità elettrica garantita

Flexible conduits in hot galvanized steel with Sendzimir method (UNI EN 10346:2009). The conduits are protected by galvanised steel braid. They provide excellent flexibility and good mechanical resistance together with good protection against electro-magnetic interference.


They are used in industrial applications where a high level of thermal resistance is required, with TN fittings the system is without any plastic materials.

Electrical continuity guaranteed



- Standard
CEI EN 61386-1 e CEI EN61386-23
- Classificazione CEI EN 61386 3 3 5 6
- Grado IP CEI EN 60529 IP40
- Resistenza alla compressione 750 N
- Resistenza all'urto 2 J
- Resistenza alla corrosione 2 Media
- Schermatura EMC secondo IEC TS 61587: 30-230MHz
Livello1 (Abbattimento min. 35dB)

- Standard
IEC EN 61386-1 and 61386-23
- Classification °IEC EN 61386 3 3 5 6
- IP degree IEC EN 60529 IP40
- Compressive strength 750 N
- Impact resistance 2 J
- Corrosion resistance 2 Medium
- EMC shielding in according to IEC TS 61587:30 - 230MHz
Level 1 (minimum abatement 35dB)



Aggraffatura semplice Simple interlocking



CODICE CODE	DIAMETRO NOMINALE NOMINAL DIAMETER	DIAMETRO INTERNO INTERNAL DIAMETER mm	DIAMETRO ESTERNO EXTERNAL DIAMETER mm	RAGGIO DI CURVA CURVE RADIUS	CONFEZIONE PACKAGE m
607T-10*	10	10,0	15,5	30	50
607T-12*	12	12,0	17,5	35	50
607T-16*	16	15,5	21,0	40	50

* A richiesta / On request

Aggraffatura rinforzata Reinforced interlocking



CODICE CODE	DIAMETRO NOMINALE NOMINAL DIAMETER	DIAMETRO INTERNO INTERNAL DIAMETER mm	DIAMETRO ESTERNO EXTERNAL DIAMETER mm	RAGGIO DI CURVA CURVE RADIUS	CONFEZIONE PACKAGE m
607T-20*	21	20,5	26,0	50	50
607T-27*	27	26,5	33,0	70	25
607T-35*	35	35,0	41,5	90	25
607T-40*	40	40,0	47,0	105	25
607T-50*	51	50,5	58,0	130	25

* A richiesta / On request

IEC TS 61587



Accessori correlati Related accessories



Serie Series

T

6014	6014-G	6014XX	6014-P	6015	6115	6024	6025	6117	6117XX	TN
pag. 56	pag. 58	pag. 61	pag. 63	pag. 60	pag. 64	pag. 65	pag. 84	pag. 87	pag. 68/69	