


■ Raccordi a innesto rapido Quick coupling fittings

Pressacavo per tubi metallici rigidi **6111P** Cable gland for rigid metal conduits **6111P**

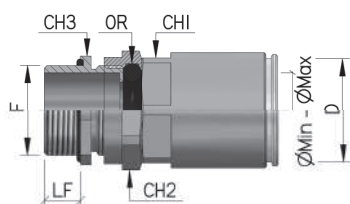

**IP66
IP68**

Particolari realizzati in ottone nichelato.
Le caratteristiche di funzionamento sono identiche a quelle dei raccordi cod.6110-6111; questi particolari raccordi includono un adattatore pressacavo con terminale filettato maschio.
Sono prodotti con filettatura METRICA ISO in conformità alle norme CEI EN 60423.
Questi accessori sono utilizzati quando è necessario rendere stagna una parte dell'impianto.

- Standard
CEI EN 61386 e CEI EN 62444
- Grado IP EN 60529 **IP66/IP68**

Made of nickel plated brass.
The operating characteristics are identical to those of the fittings code 6110-6111; these special fittings include a cable gland adapter with a metric male threaded heads.
The thread is ISO Metric and complies with IEC EN 60423.

These accessories are designed for use when it becomes necessary to give water-tightness to the system.

- Standard
IEC EN 61386 and IEC EN 62444
- IP degree EN 60529 **IP66/IP68**

Filettatura Metrica Metric thread

CODICE CODE	DIAMETRO NOMINALE NOMINAL DIAMETER ØD mm	SERRAGGIO TIGHTENING ØMin ØMax	DIMENSIONI mm DIMENSIONS mm				LF	CONFEZIONE PACKAGE pz / pcs.
			F	CH1	CH2	CH3		
6111P16M120509	16	05 ÷ 09	M 12x1,5	20	20	20	10	30
6111P16M160509	16	05 ÷ 09	M 16x1,5	20	20	20	10	30
6111P16M200812	16	08 ÷ 12	M 20x1,5	20	24	24	10	30
6111P20M160812	20	08 ÷ 12	M 16x1,5	24	24	24	10	30
6111P20M200812	20	08 ÷ 12	M 20x1,5	24	24	24	10	30
6111P20M251116	20	11 ÷ 16	M 25x1,5	24	30	30	10	30
6111P25M201116	25	11 ÷ 16	M 20x1,5	29	30	30	10	20
6111P25M251116	25	11 ÷ 16	M 25x1,5	29	30	20	10	20
6111P25M321521	25	15 ÷ 21	M 32x1,5	29	36	36	10	20
6111P32M251521	32	15 ÷ 21	M 25x1,5	37	36	36	10	10
6111P32M321521	32	15 ÷ 21	M 32x1,5	37	36	36	10	10
6111P32M402027	32	20 ÷ 27	M 40x1,5	37	45	45	10	10
6111P40M322027	40	20 ÷ 27	M 32x1,5	46	45	45	10	5
6111P40M402027	40	20 ÷ 27	M 40x1,5	46	45	45	10	5