


■ Guaina metallica Flexible conduit

A doppia aggraffatura **667DM** Double interlocking **667DM**

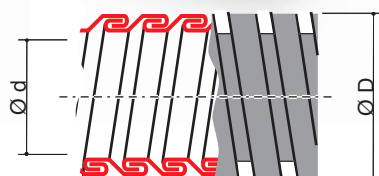

Tubi flessibili in acciaio zincato a caldo con metodo Sendzimir (UNI EN 10346) profilato a doppia aggraffatura.

Presentano buona flessibilità ed ottima resistenza meccanica, in modo particolare per le sollecitazioni a trazione, torsione ed urto. Continuità elettrica garantita

E' necessario l'utilizzo dell'accessorio cod. 66BOTT boccola in ottone in sostituzione della boccola in nylon normalmente in dotazione nei raccordi.

- Standard
CEI EN 61386-1, CEI EN 61386-23
- Classificazione CEI EN 61386 **4 4 5 6**
- Grado IP CEI EN 60529 **IP40**
- Resistenza alla compressione **1250 N**
- Resistenza all'urto **6 J**
- Resistenza alla trazione **1000 N**
- Resistenza al carico sospeso **450 N**
- Resistenza alla corrosione **2 Media**

Flexible conduits in hot galvanized steel with Sendzimir method (UNI EN 10346) double-interlocking profiled. They are extremely flexible and have an excellent mechanical resistance particularly when subjected to stress resulting from traction, torsion and impact.

Electrical continuity guaranteed

It is necessary the use of the accessory code 66BOTT brass bushing to replace the nylon bushing normally supplied with the fittings.

- Standard
IEC EN 61386-1 and 61386-23
- Classification CEI EN 61386 **4 4 5 6**
- IP degree IEC EN 60529 **IP40**
- Compressive strength **1250 N**
- Impact resistance **6 J**
- Tensile strenght **1000 N**
- Resistance to suspended load **450 N**
- Corrosion resistance **2 Medium**

Aggraffatura doppia Double interlocking



CODICE CODE	DIAMETRO NOMINALE NOMINAL DIAMETER	DIAMETRO INTERNO INTERNAL DIAMETER	DIAMETRO ESTERNO EXTERNAL DIAMETER	RAGGIO DI CURVA CURVE RADIUS	CONFEZIONE PACKAGE
		mm	mm		m
667DM10	10	10,0	13,0	50	50
667DM12	12	12,0	15,0	55	50
667DM15	16	15,5	18,5	60	50
667DM20	21	20,5	24,5	90	50
667DM26	27	26,5	30,0	110	25
667DM35	35	35,0	39,0	130	25
667DM40	40	40,0	44,0	160	25
667DM50	51	50,5	54,5	200	25
667DM63*	63	63,0	67,5	300	12
667DM75*	75	75,0	79,5	350	8
667DM100*	100	100,0	104,5	460	8

* A richiesta / On request

Accessori correlati Related accessories

Accessorio necessario
Necessary accessory



66BOTT

6014

6014-G

6014XX

6014-P

6015

6115

6024

6025

6117

6117XX

pag. 74

pag. 56

pag. 58

pag. 61

pag. 63

pag. 60

pag. 64

pag. 65

pag. 84

pag. 87