

■ Armadio monoblocco saldato CAE


CAE Welded Compact Enclosure

Struttura con retro e porta trasparente

Structure with rear and glass door



IP55

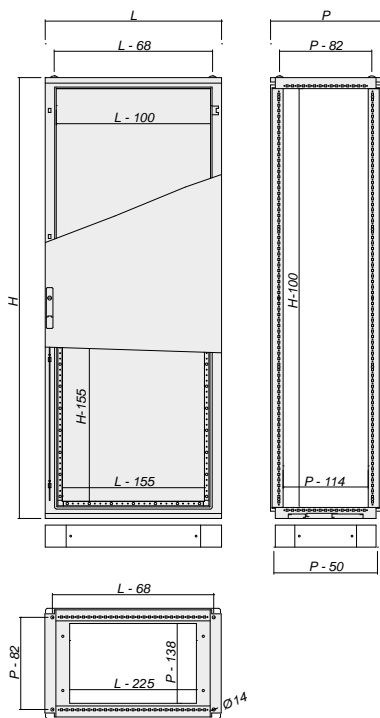

Struttura

chiusa lateralmente e superiormente in lamiera d'acciaio sp. 15/10 verniciata RAL 7035 epossipoliestere bucciato e fondo con ingresso cavi regolabile.

Retro

lamiera d'acciaio sp. 15/10 verniciato RAL 7035 bucciato. Da 4 a 10 punti di fissaggio al telaio.

Porta

lamiera d'acciaio sp. 20/10 verniciata RAL 7035 bucciato. 4 punti di chiusura, 4 cerniere e mostrina con inserto di chiusura tipo aletta doppio pettine Ø3 mm. Vetro di sicurezza sp. 40/10.

Grado di resistenza all'urto secondo IEC EN 62208: IK09

Structure

Solid sides and top, made of 15/10 steel, painted RAL 7035 with textured epoxy-polyester, adjustable cable gland bottom.

Rear panel

15/10 thick steel, painted textured RAL 7035. Ranging from 4 to 10 mounting points to the structure.

Door

20/10 thick steel, painted with textured RAL 7035. Complete with an internal reinforcement frame made of galvanized tubular profile, 4 closing points, 4 hinges and an escutcheon with Ø3 mm double-bit lock insert. 40/10 thick safety glass.

Impact resistance degree as per IEC EN 62208: IK09

H 1000

DIMENSIONI, MM DIMENSIONS, MM			
LARGHEZZA, L WIDTH, L	PROFONDITÀ, P DEPTH, P	CODICE CODE	
600	300	R5CAE1063X	
	400	R5CAE1064X	
800	300	R5CAE1083X	
	400	R5CAE1084X	
1000	300	R5CAE10103X	
	400	R5CAE10104X	

H 1200

DIMENSIONI, MM DIMENSIONS, MM			
LARGHEZZA, L WIDTH, L	PROFONDITÀ, P DEPTH, P	CODICE CODE	
600	300	R5CAE1263X	
	400	R5CAE1264X	
800	300	R5CAE1283X	
	400	R5CAE1284X	
1000	300	R5CAE12103X	
	400	R5CAE12104X	

■ Armadio monoblocco saldato CAE

CAE Welded Compact Enclosure

Struttura con retro e porta trasparente
Structure with rear and glass door




H 1400

LARGHEZZA, L WIDTH, L	DIMENSIONI, MM DIMENSIONS, MM		CODICE CODE
		PROFONDITÀ, P DEPTH, P	
600		300	R5CAE1463X
		400	R5CAE1464X
800		300	R5CAE1483X
		400	R5CAE1484X
1000		300	R5CAE14103X
		400	R5CAE14104X

H 1600

LARGHEZZA, L WIDTH, L	DIMENSIONI, MM DIMENSIONS, MM		CODICE CODE
		PROFONDITÀ, P DEPTH, P	
600		300	R5CAE1663X
		400	R5CAE1664X
800		300	R5CAE1683X
		400	R5CAE1684X
1000		300	R5CAE16103X
		400	R5CAE16104X

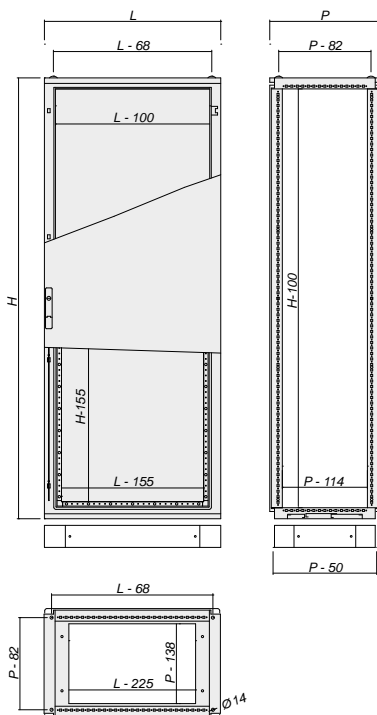

■ Armadio monoblocco saldato CAE

CAE Welded Compact Enclosure

Struttura con retro e porta trasparente
Structure with rear and glass door



H 1800

LARGHEZZA, L WIDTH, L	DIMENSIONI, MM DIMENSIONS, MM		CODICE CODE
		PROFONDITÀ, P DEPTH, P	
600		300	R5CAE1863X
		400	R5CAE1864X
		500	R5CAE1865X
		600	R5CAE1866X
800		300	R5CAE1883X
		400	R5CAE1884X
		500	R5CAE1885X
		600	R5CAE1886X
1000		400	R5CAE18104X
		500	R5CAE18105X
		600	R5CAE18106X
1200*		400	R5CAE18124X
		500	R5CAE18125X
		600	R5CAE18126X

* Con doppia anta With double door

H 2000

LARGHEZZA, L WIDTH, L	DIMENSIONI, MM DIMENSIONS, MM		CODICE CODE
		PROFONDITÀ, P DEPTH, P	
600		300	R5CAE2063X
		400	R5CAE2064X
		500	R5CAE2065X
		600	R5CAE2066X
800		300	R5CAE2083X
		400	R5CAE2084X
		500	R5CAE2085X
1000		600	R5CAE2086X
		400	R5CAE20104X
		500	R5CAE20105X
1200*		600	R5CAE20106X
		400	R5CAE20124X
		500	R5CAE20125X
	600	R5CAE20126X	

* Con doppia anta With double door

