

CONDIZIONATORI DA PARETE OUTDOOR UL LISTED UL LISTED WALL MOUNTED OUTDOOR COOLERS

4000W
4000W



Descrizione Description

• Tutte le versioni bifase e trifase possono essere alimentate a differenti tensioni, mediante la modifica del cablaggio interno (seguire schemi).

■ Campo regolazione temperatura (set di fabbrica) da / a: **+30°C / +40°C**

■ Livello di rumore **72 dB (A)**

■ Tipo di refrigerante: **R513a**.

■ Tipo ciclo di lavoro **100%**

■ NEMA TYPE 4 per cover verniciata

• All two-phase and three-phase versions can be supplied with different voltages, by changing the internal wiring (follow diagrams).

■ Temperature regulating range (factory set) from /to **+30°C / +40°C**

■ Noise level **72 dB (A)**


■ Coolant type: **R513a**.

■ Operating cycle type **100%**

■ NEMA TYPE 4 for painted cover

Opzionale
COVER FRONTALE AISI 316 = RO6ULK...

Optional
AISII INOX 316 FRONT COVER = RO6ULK...

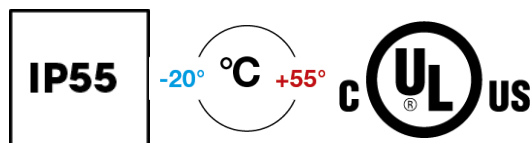

Dati Tecnici Technical Data

COVER VERNICIATA/PAINTED


CODICE CODE	TENSIONE ALIMENTAZIONE POWER SUPPLY	FREQUENZA FREQUENCY HZ	POTENZA FRIGORIFERA (DIN_3168,W) REFRIGERATING POWER (DIN_3168,W)		DISPOSITIVO DI PROTEZIONE E SICUREZZA SUGGERITO SUGGESTED PROTECTION AND SAFETY DEVICE	POTENZA ASSORBITA POWER CONSUMPTION		FLA MASSIMA CORRENTE DI ESERCIZIO FLA MAXIMUM OPERATING CURRENT	CORRENTE DI SPUNTO STARTING CURRENT	PESO WEIGHT KG
			L35/L35	L35/L50		L35/L35	L35/L50			
ROULK40043L	400 / 460 Vac - 3 ph	50/60	4000/4200	3000/3150	8 A	1850/2050	2170/2550	3,3 / 3,7 A	15 A	75

COVER INOX/AISI 304

CODICE CODE	TENSIONE ALIMENTAZIONE POWER SUPPLY	FREQUENZA FREQUENCY HZ	POTENZA FRIGORIFERA (DIN_3168,W) REFRIGERATING POWER (DIN_3168,W)		DISPOSITIVO DI PROTEZIONE E SICUREZZA SUGGERITO SUGGESTED PROTECTION AND SAFETY DEVICE	POTENZA ASSORBITA POWER CONSUMPTION		FLA MASSIMA CORRENTE DI ESERCIZIO FLA MAXIMUM OPERATING CURRENT	CORRENTE DI SPUNTO STARTING CURRENT	PESO WEIGHT KG
			L35/L35	L35/L50		L35/L35	L35/L50			
RO4ULK40043L	400 / 460 Vac - 3 ph	50/60	4000/4200	3000/3150	8 A	1850/2050	2170/2550	3,3 / 3,7 A	15 A	75

4000W
4000W

Specifiche tecniche Technical Specs

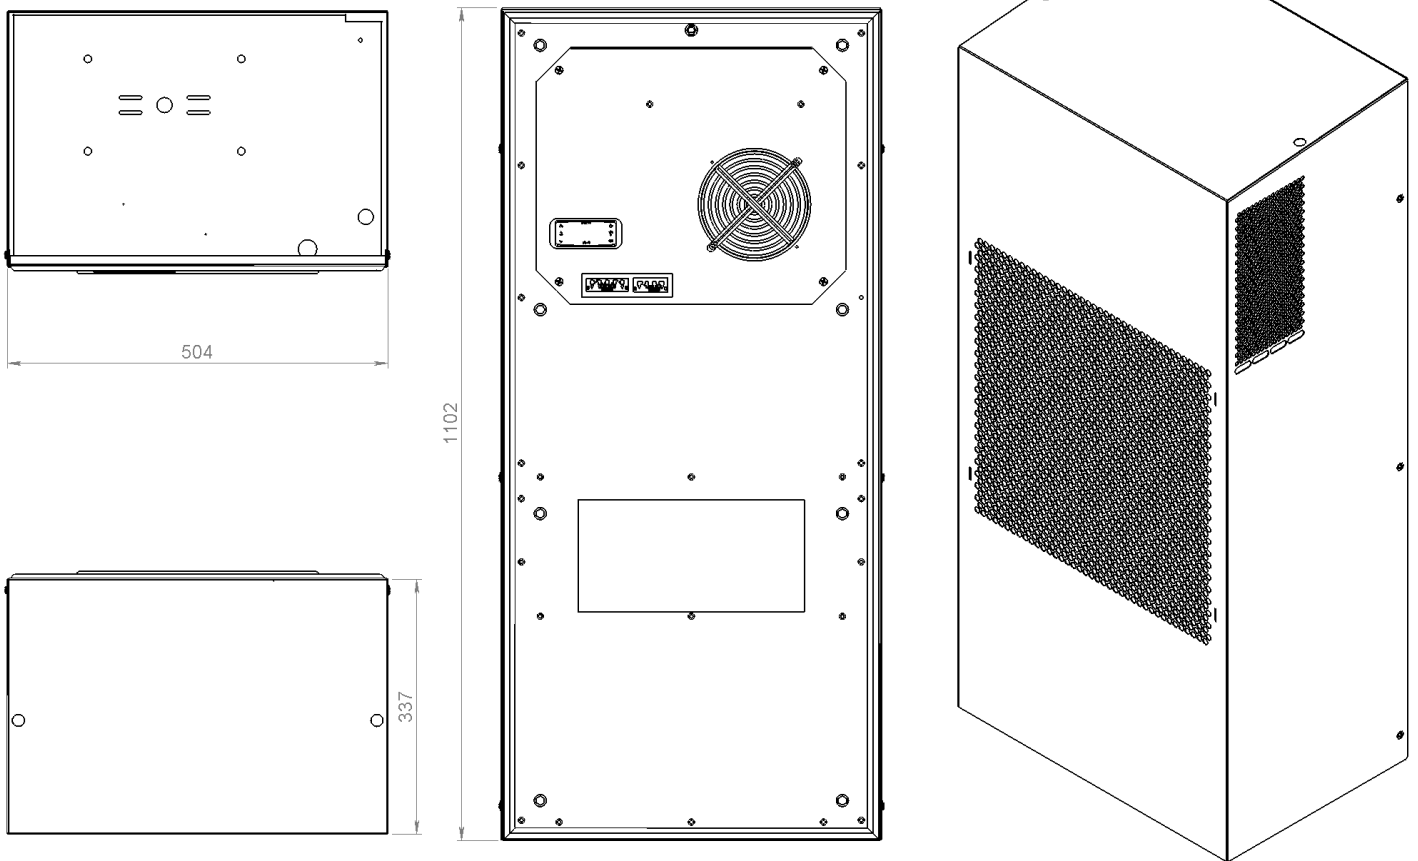


4000W
4000W

Specifiche tecniche Technical Specs

Potenza frigorifera
Refrigeration power

W 50Hz

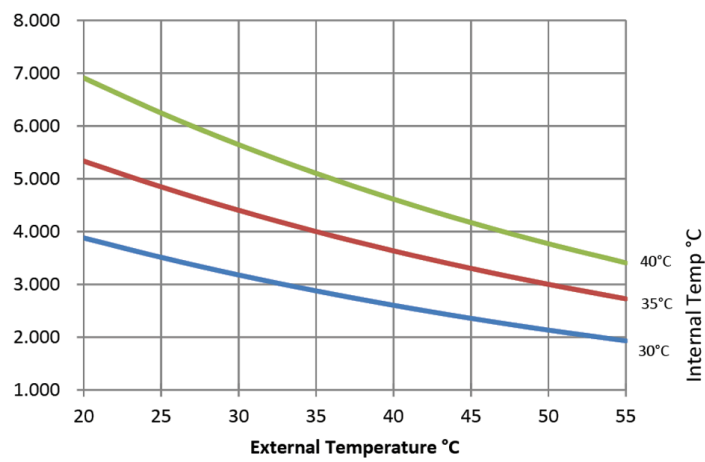

W 60Hz

