


CONDIZIONATORI DA PARETE OUTDOOR PER AMBIENTI GRAVOSI UL LISTED UL LISTED WALL MOUNTED OUTDOOR COOLERS FOR HARSH ENVIRONMENTS

1500W
1500W

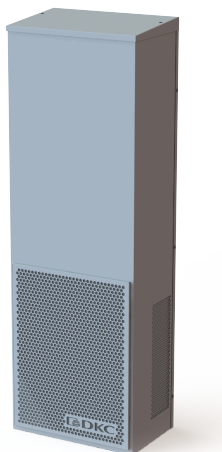

Descrizione Description

• Tutte le versioni bifase e trifase possono essere alimentate a differenti tensioni, mediante la modifica del cablaggio interno (seguire schemi).

■ Campo regolazione temperatura (set di fabbrica) da / a: **+30°C / +40°C**

■ Livello di rumore **69 dB (A)**

■ Tipo di refrigerante: nuovo gas **R513a**.

■ Tipo ciclo di lavoro 100%

Opzionale

COVER FRONTALE AISI 316 = RH6ULK...

• All two-phase and three-phase versions can be supplied with different voltages, by changing the internal wiring (follow diagrams).

■ Temperature regulating range (factory set) from /to **+30°C / +40°C**

■ Noise level **69 dB (A)**


■ Coolant type: new **R513a** gas.

■ Operating cycle type **100%**

Optional

AISI INOX 316 FRONT COVER = RH6ULK...

IP55



Dati Tecnici Technical Data

COVER INOX/AISI 304





CODICE CODE	VERSIONE VERSION	TENSIONE ALIMENTAZIONE POWER SUPPLY	FREQUENZA FREQUENCY HZ	POTENZA FRIGORIFERA (DIN_3168,W) REFRIGERATING POWER (DIN_3168,W)		POTENZA ASSORBITA POWER CONSUMPTION		FLA MASSIMA CORRENTE DI ESERCIZIO FLA MAXIMUM OPERATING CURRENT	CORRENTE DI SPUNTO STARTING CURRENT	PESO WEIGHT KG
				L35/L35	L35/L50	L35/L35	L35/L50			
RH4ULK15021L	-	230 Vac - 1 ph	50/60	1500 / 1550	1160 / 1190	700/780	900/980	5,7 / 6,2	28 A	41
RH4ULK15042L	-	400 Vac - 2 ph	50/60	1500/1550	1160/1190	700/800	900/980	3,3 / 3,6	16 A	45

COVER VERNICIATA/PAINTED

CODICE CODE	VERSIONE VERSION	TENSIONE ALIMENTAZIONE POWER SUPPLY	FREQUENZA FREQUENCY HZ	POTENZA FRIGORIFERA (DIN_3168,W) REFRIGERATING POWER (DIN_3168,W)		POTENZA ASSORBITA POWER CONSUMPTION		FLA MASSIMA CORRENTE DI ESERCIZIO FLA MAXIMUM OPERATING CURRENT	CORRENTE DI SPUNTO STARTING CURRENT	PESO WEIGHT KG
				L35/L35	L35/L50	L35/L35	L35/L50			
RHULK15021L	-	230 Vac - 1 ph	50/60	1500 / 1550	1160 / 1190	700/780	900/980	5,7 / 6,2	28 A	41
RHULK15042L	-	400 Vac - 2 ph	50/60	1500/1550	1160/1190	700/800	900/980	3,3 / 3,6	16 A	45

1500W
1500W

Specifiche tecniche Technical Specs

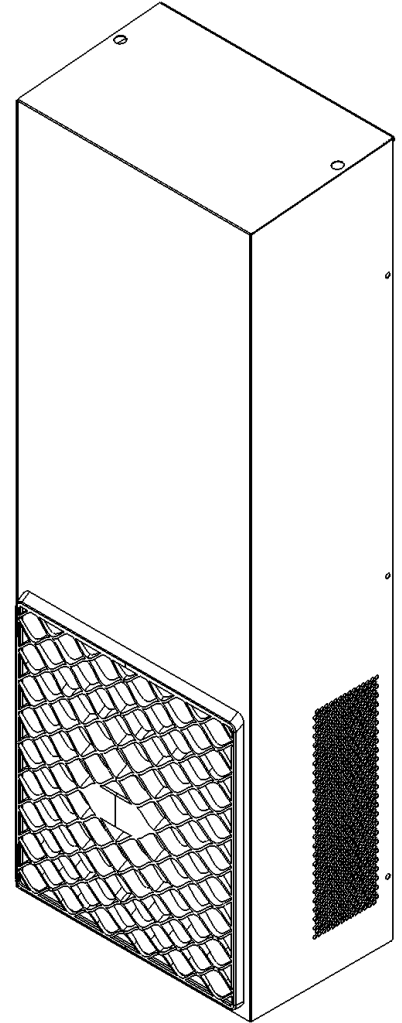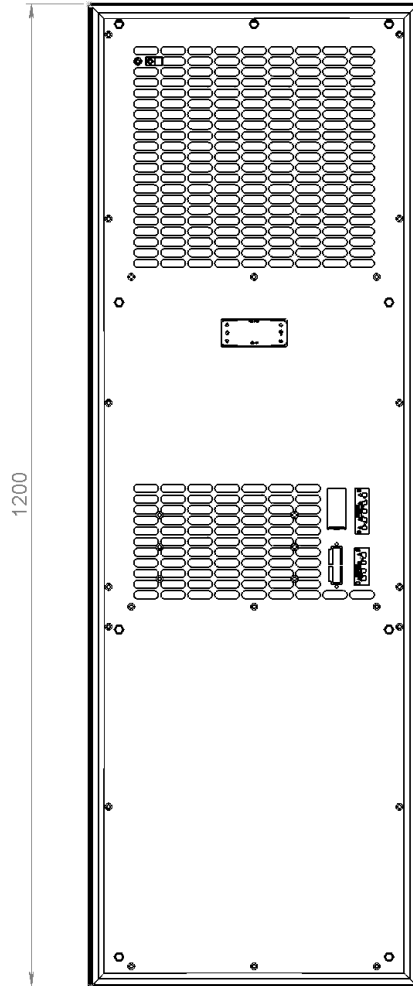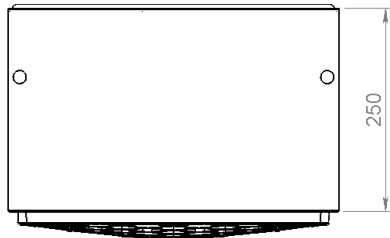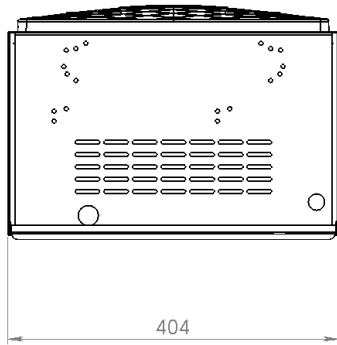


1500W
1500W

Specifiche tecniche Technical Specs

Potenza frigorifera
Refrigeration power

W 50Hz

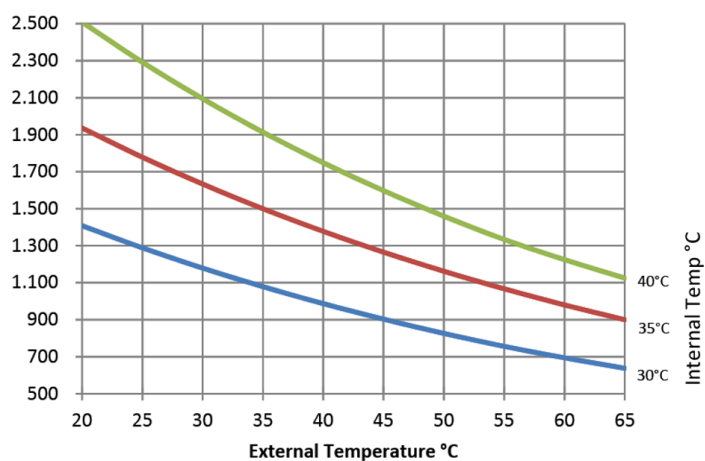

W 60Hz

