

CONDIZIONATORI SLIM SLIM COOLERS

SLIM OUT 3000W
SLIM OUT 3000W




Descrizione Description

- Tutte le versioni bifase e trifase possono essere alimentate a differenti tensioni, mediante la modifica del cablaggio interno (seguire schemi).
 - Campo regolazione temperatura (set di fabbrica) da / a: **+30°C / +40°C**
 - Livello di rumore **71 dB (A)**
 - Tipo di refrigerante: In corso la sostituzione del gas attuale **R134a** con il nuovo gas **R513a**.
 - Tipo ciclo di lavoro **100%**
- Opzionale**
COLORE SPECIALE = R9CND...
COVER FRONTALE AISI 316 = RI6CND..

- All two-phase and three-phase versions can be supplied with different voltages, by changing the internal wiring (follow diagrams).
 - Temperature regulating range (factory set) from /to **+30°C / +40°C**
 - Noise level **71 dB (A)**
 - Coolant type: on course to replace the current gas **R134a** with the new **R513a** gas.
 - Operating cycle type **100%**
- Optional**
SPECIAL COLOR = R9CND...
AIS I INOX 316 FRONT COVER = RI6CND...

IP54



Dati Tecnici Technical Data

COVER VERNICIATA/PAINTED


CODICE CODE	VERSIONE VERSION	TENSIONE ALIMENTAZIONE POWER SUPPLY	FREQUENZA FREQUENCY	POTENZA FRIGORIFERA (DIN 3168,W) REFRIGERATING POWER (DIN 3168,W)		DISPOSITIVO DI PROTEZIONE E SICUREZZA SUGGERITO SUGGESTED PROTECTION AND SAFETY DEVICE	POTENZA ASSORBITA POWER CONSUMPTION		FLA MASSIMA CORRENTE DI ESERCIZIO FLA MAXIMUM OPERATING CURRENT	CORRENTE DI SPUNTO STARTING CURRENT	PESO WEIGHT	
				L35/L35	L35/L50		L35/L35	L35/L50			KG	KG
R5CND30021SOT	SLIM OUT	230 Vac - 1 ph	50	2800	2240	12 A	1100	1260	7A	35 A	70	70
R5CND30043SOT	SLIM OUT	400 / 440 Vac - 3 ph	50/60	2800/3080	2240/2350	8 A	1100/1270	1260/1520	2,6 / 2,9 A	12 A	70	70

COVER INOX/AISI 304

CODICE CODE	VERSIONE VERSION	TENSIONE ALIMENTAZIONE POWER SUPPLY	FREQUENZA FREQUENCY	POTENZA FRIGORIFERA (DIN 3168,W) REFRIGERATING POWER (DIN 3168,W)		DISPOSITIVO DI PROTEZIONE E SICUREZZA SUGGERITO SUGGESTED PROTECTION AND SAFETY DEVICE	POTENZA ASSORBITA POWER CONSUMPTION		FLA MASSIMA CORRENTE DI ESERCIZIO FLA MAXIMUM OPERATING CURRENT	CORRENTE DI SPUNTO STARTING CURRENT	PESO WEIGHT	
				L35/L35	L35/L50		L35/L35	L35/L50			KG	KG
RICND30021SOT	SLIM OUT	230 Vac - 1 ph	50	2800	2240	12 A	1100	1260	7A	35 A	70	70
RICND30043SOT	SLIM OUT	400 / 440 Vac - 3 ph	50/60	2800/3080	2240/2350	8 A	1100/1270	1260/1520	2,6 / 2,9 A	12 A	70	70

SLIM OUT 3000W
SLIM OUT 3000W

Specifiche tecniche Technical Specs

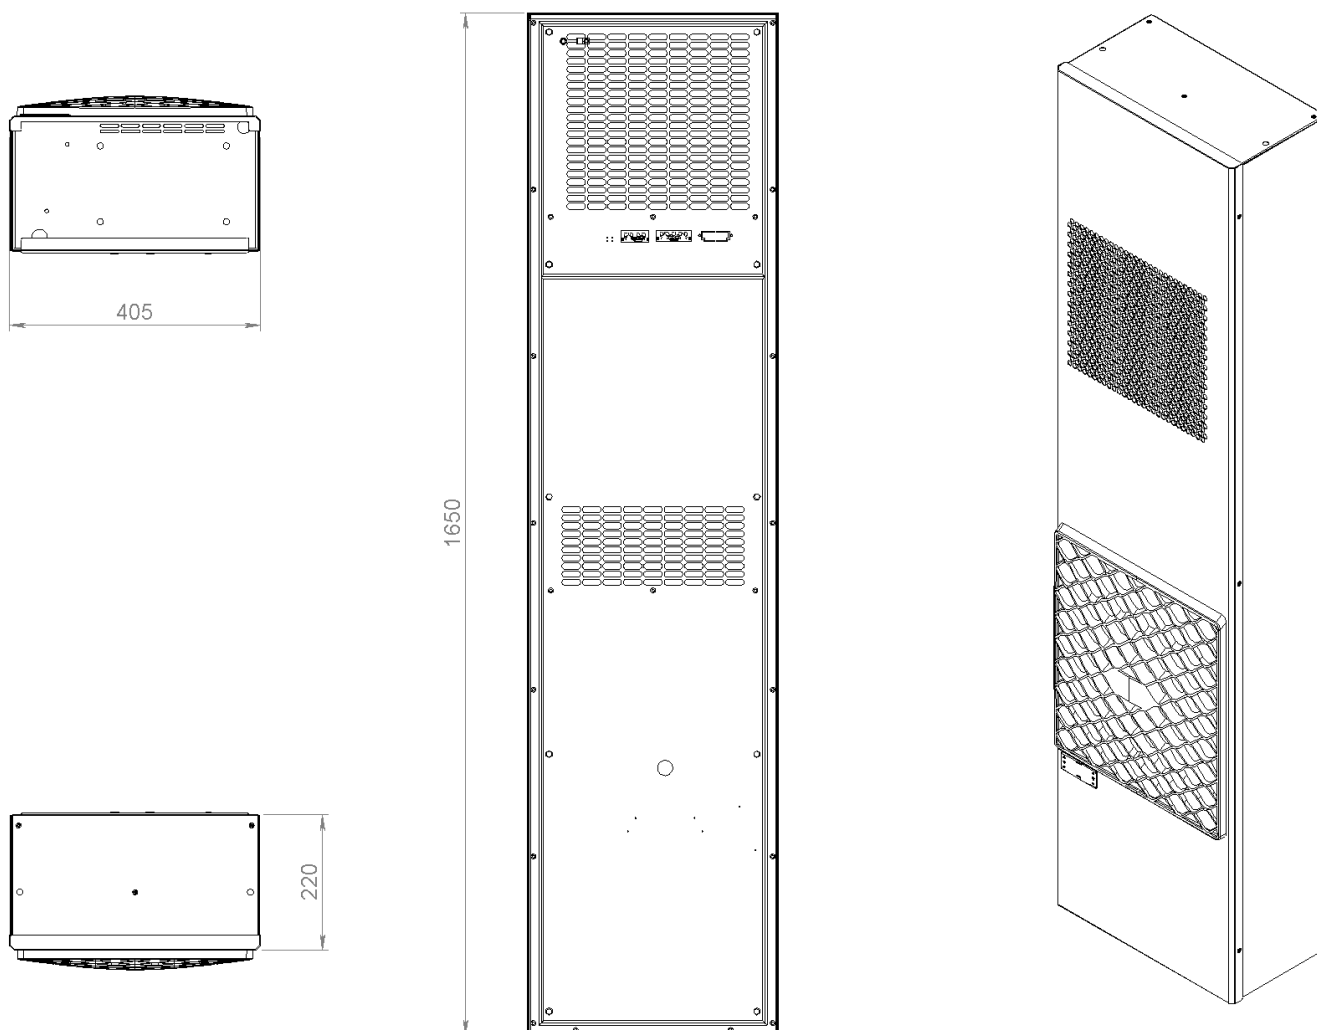


SLIM OUT 3000W
SLIM OUT 3000W

Specifiche tecniche Technical Specs

Potenza frigorifera
Refrigeration power

W 50Hz

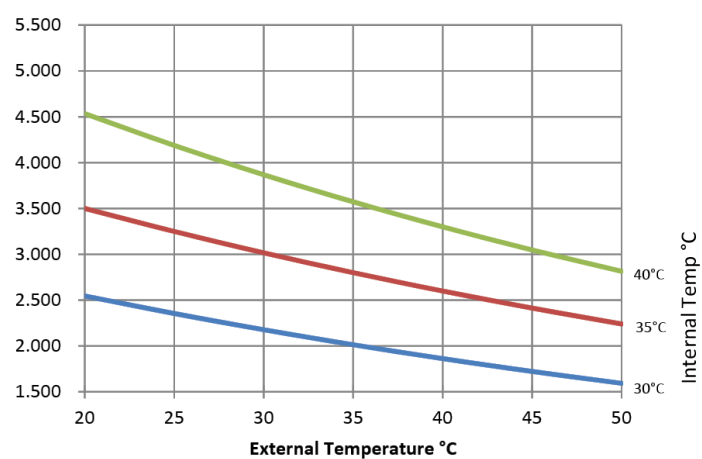

W 60Hz

