

CONDIZIONATORI DA TETTO INDOOR ROOF MOUNTED INDOOR COOLERS

3000W
3000W




Descrizione Description

- Tutte le versioni bifase e trifase possono essere alimentate a differenti tensioni, mediante la modifica del cablaggio interno (seguire schemi).
- Campo regolazione temperatura (set di fabbrica) da / a: **+30°C / +40°C**
- Livello di rumore **71 dB (A)**
- Tipo di refrigerante **R134a**. In via di definizione la sostituzione del gas attuale con il nuovo gas **R513a**.
- Tipo ciclo di lavoro **100%**
- Peso **72 kg**
- Opzionale**
COLORE SPECIALE = R9CND...
COVER FRONTALE AISI 316 = RI6CND..

- All two-phase and three-phase versions can be supplied with different voltages, by changing the internal wiring (follow diagrams).
- Temperature regulating range (factory set) from /to **+30°C / +40°C**
- Noise level **71 dB (A)**
- Coolant type: on course to replace the current gas **R134a** with the new **R513a** gas.
- Operating cycle type **100%**
- Weight **72 Kg**
- Optional**
SPECIAL COLOR = R9CND...
AIS I INOX 316 FRONT COVER = RI6CND...

IP54



Dati Tecnici Technical Data

COVER VERNICIATA/PAINTED



CODICE CODE	VERSIONE VERSION	TENSIONE ALIMENTAZIONE POWER SUPPLY	FREQUENZA FREQUENCY HZ	POTENZA FRIGORIFERA (DIN 3168,W) REFRIGERATING POWER (DIN_3168,W)		DISPOSITIVO DI PROTEZIONE E SICUREZZA SUGGERITO SUGGESTED PROTECTION AND SAFETY DEVICE	POTENZA ASSORBITA POWER CONSUMPTION		FLA MASSIMA CORRENTE DI ESERCIZIO FLA MAXIMUM OPERATING CURRENT	CORRENTE DI SPUNTO STARTING CURRENT	PESO WEIGHT KG
				L35/L35	L35/L50		L35/L35	L35/L50			
R5CND30021RT	TOP	230 Vac - 1 ph	50	2800	2240	12 A	1100	1260	7	35 A	72
R5CND30043RT	TOP	400 / 440 Vac - 3 ph	50/60	2800 / 3080	2240 / 2350	8 A	1100 / 1270	1260/1520	2,5 / 2,9	12 A	72

COVER INOX/AISI 304

CODICE CODE	VERSIONE VERSION	TENSIONE ALIMENTAZIONE POWER SUPPLY	FREQUENZA FREQUENCY HZ	POTENZA FRIGORIFERA (DIN 3168,W) REFRIGERATING POWER (DIN_3168,W)		DISPOSITIVO DI PROTEZIONE E SICUREZZA SUGGERITO SUGGESTED PROTECTION AND SAFETY DEVICE	POTENZA ASSORBITA POWER CONSUMPTION		FLA MASSIMA CORRENTE DI ESERCIZIO FLA MAXIMUM OPERATING CURRENT	CORRENTE DI SPUNTO STARTING CURRENT	PESO WEIGHT KG
				L35/L35	L35/L50		L35/L35	L35/L50			
RICND30021RT	TOP	230 Vac - 1 ph	50	2800	2240	12 A	1100	1260	7	35 A	72
RICND30043RT	TOP	400 / 440 Vac - 3 ph	50/60	2800 / 3080	2240 / 2350	8 A	1100 / 1270	1260/1520	2,5 / 2,9	12 A	72

3000W
3000W

Specifiche tecniche Technical Specs

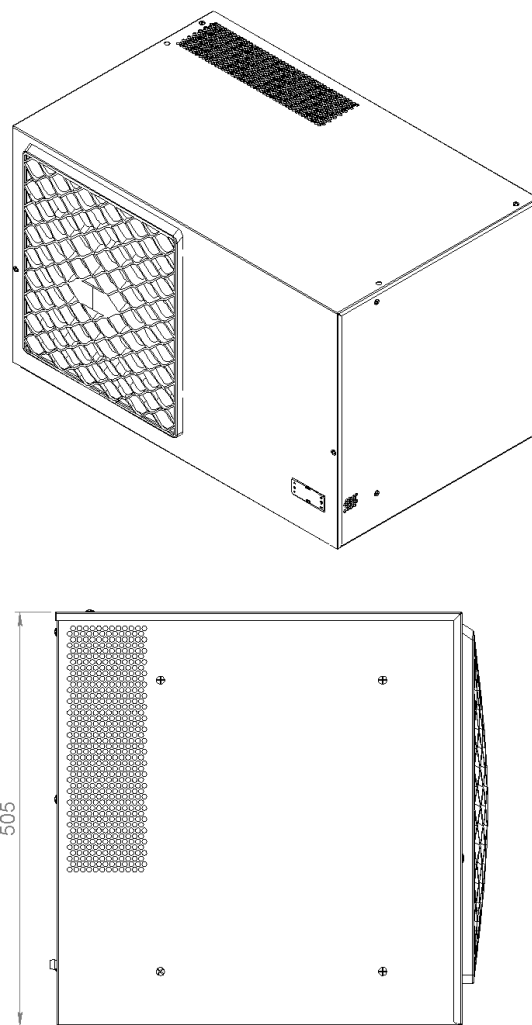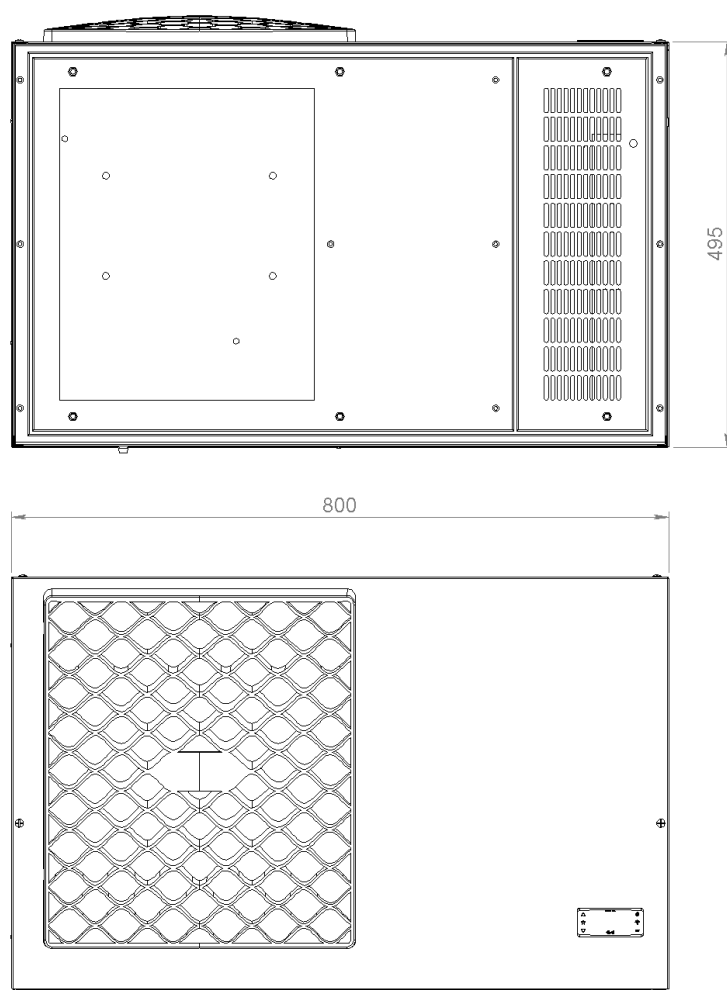


3000W
3000W

Specifiche tecniche Technical Specs

Potenza frigorifera
Refrigeration power

W 50Hz

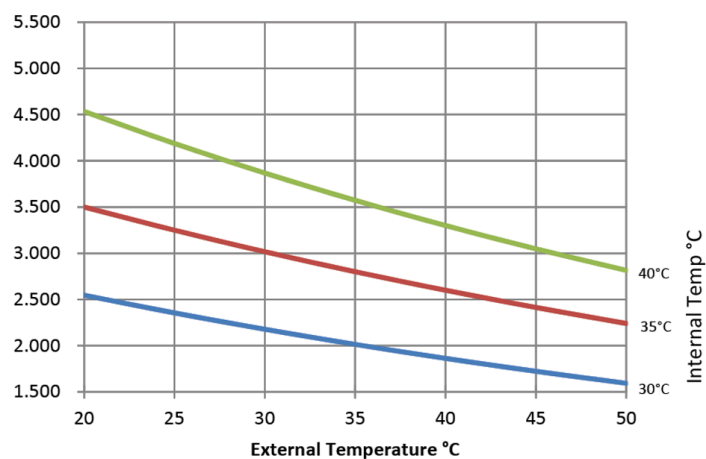

W 60Hz

