

CONDIZIONATORI DA TETTO INDOOR ROOF MOUNTED INDOOR COOLERS

4000W
4000W



Descrizione Description


- All two-phase and three-phase versions can be supplied with different voltages, by changing the internal wiring (follow diagrams).
- Campo regolazione temperatura (set di fabbrica) da / a: **+30°C / +40°C**
- Livello di rumore **72 dB (A)**
- Tipo di refrigerante **R134a**. In via di definizione la sostituzione del gas attuale con il nuovo gas **R513a**.
- Tipo ciclo di lavoro **100%**
- Peso **75 kg**

Opzionale
COLORE SPECIALE = R9CND...
COVER FRONTALE AISI 316 = RI6CND..

- All two-phase and three-phase versions can be supplied with different voltages, by changing the internal wiring (follow diagrams).
- Temperature regulating range (factory set) from /to **+30°C / +40°C**
- Noise level **72 dB (A)**
- Coolant type: on course to replace the current gas **R134a** with the new **R513a** gas.
- Operating cycle type **100%**
- Weight **75 kg**

Optional
SPECIAL COLOR = R9CND...
AIS I INOX 316 FRONT COVER = RI6CND...

IP54



Dati Tecnici Technical Data

COVER VERNICIATA/PAINTED





CODICE CODE	VERSIONE VERSION	TENSIONE ALIMENTAZIONE POWER SUPPLY	FREQUENZA FREQUENCY HZ	POTENZA FRIGORIFERA (DIN_3168,W) REFRIGERATING POWER (DIN_3168,W)		DISPOSITIVO DI PROTEZIONE E SICUREZZA SUGGERITO SUGGESTED PROTECTION AND SAFETY DEVICE	POTENZA ASSORBITA POWER CONSUMPTION		FLA MASSIMA CORRENTE DI ESERCIZIO FLA MAXIMUM OPERATING CURRENT	CORRENTE DI SPUNTO STARTING CURRENT	PESO WEIGHT KG
				L35/L35	L35/L50		L35/L35	L35/L50			
R5CND40021RT	TOP	230 Vac - 1 ph	50	3850	2850	-	1800	2120	9 A	35 A	75
R5CND40043RT	TOP	400 / 440 Vac - 3 ph	50/60	4000 / 4200	3000 / 3150	8 A	1800 / 2000	2120 / 2500	3,3 / 3,7 A	15 A	75

COVER INOX/AISI 304

CODICE CODE	VERSIONE VERSION	TENSIONE ALIMENTAZIONE POWER SUPPLY	FREQUENZA FREQUENCY HZ	POTENZA FRIGORIFERA (DIN_3168,W) REFRIGERATING POWER (DIN_3168,W)		DISPOSITIVO DI PROTEZIONE E SICUREZZA SUGGERITO SUGGESTED PROTECTION AND SAFETY DEVICE	POTENZA ASSORBITA POWER CONSUMPTION		FLA MASSIMA CORRENTE DI ESERCIZIO FLA MAXIMUM OPERATING CURRENT	CORRENTE DI SPUNTO STARTING CURRENT	PESO WEIGHT KG
				L35/L35	L35/L50		L35/L35	L35/L50			
RICND40021RT	TOP	230 Vac - 1 ph	50	3850	2850	-	1800	2120	9 A	35 A	75
RICND40043RT	TOP	400 / 440 Vac - 3 ph	50/60	4000 / 4200	3000 / 3150	8 A	1800 / 2000	2120 / 2500	3,3 / 3,7 A	15 A	75

4000W
4000W

Specifiche tecniche Technical Specs

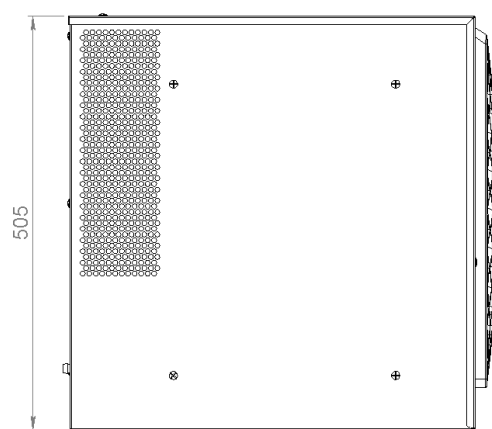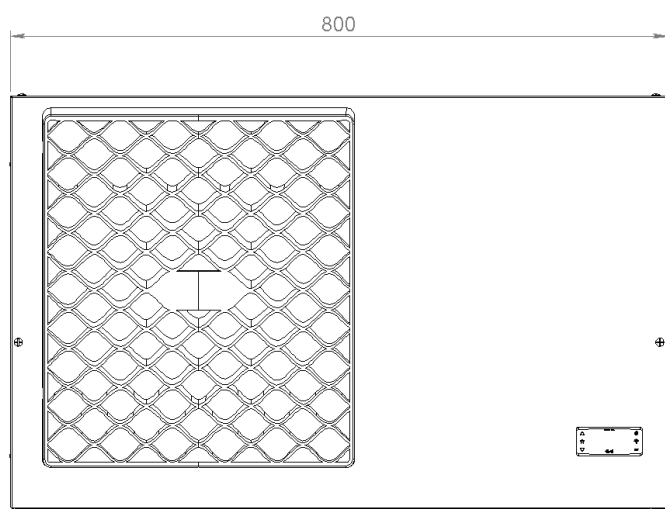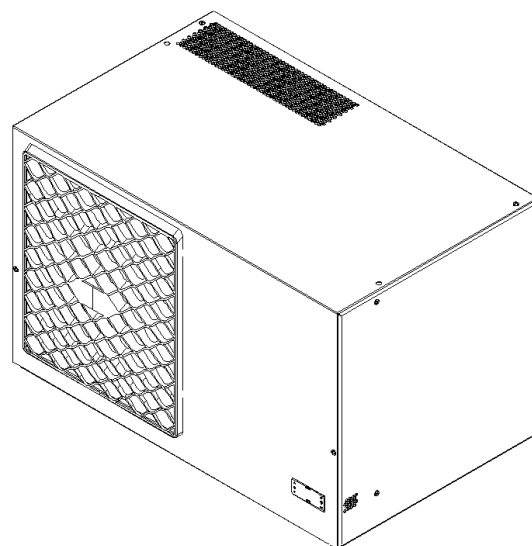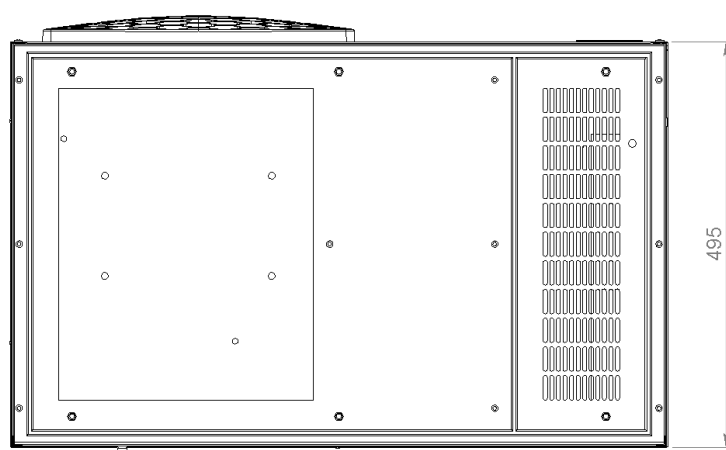

4000W
4000W

Specifiche tecniche Technical Specs

Potenza frigorifera
Refrigeration power

