

VENTILATORI DA PARETE WALL MOUNTED FANS

DIMENSIONI 325X325MM
DIMENSIONS 325X325MM




Descrizione Description

- Materiale: PC/ABS resistente ai raggi UV
- Range di fissaggio: spessore da 1 a 2 mm per R5KF08, da 1 a 2,1 mm per R5KF12, da 1,5 a 3 mm per R5KF15, da 1,5 a 2,5 mm per R5KF20.
- Filtro lavabile circa 10 volte
- Classe di filtraggio **G3 secondo EN 779**
- Certificazione UL Recognized esclusivamente sulle versioni KVG.

- Material: UV-resistant PC/ABS
- Fixing range: thickness 1 to 2 mm for R5KV08, 1 to 2.1 mm for R5KV12, 1.5 to 3 mm for R5KV15, 1.5 to 2.5 mm for R5KV20
- Filter washable approx. 10 times
- Filter class **G3 according to EN 779**
- UL Recognised on KVG versions only.

IP54




Dati Tecnici Technical Data

COVER VERNICIATA/PAINTED


CODICE CODE	TENSIONE VOLTAGE VAC	FREQUENZA FREQUENCY HZ	ASSORBIMENTO ABSORPTION A W	LIVELLO RUMORE NOISE LEVEL DB (A)	PORTATA D'ARIA DEL VENTILATORE FAN FLOW RATE M3/H	PRESSIONE PRESSURE PA	CE	UL LISTED
R5KV20115	115	50/60	0,53/0,65	60/74	66,0/69,2	520/580	160/185	• -
R5KV20230	230	50/60	0,318/0,381	73/87	65,3/68,1	520/580	160/185	• -
R5KVG20115U	115	50/60	1,5/1,8	165/215	74,7/78,9	670/760	210/220	• •
R5KVG20230U	230	50/60	0,67/0,85	155/195	66/69,2	670/760	210/220	• •

DIMENSIONI 325X325MM
DIMENSIONS 325X325MM

Specifiche tecniche Technical Specs

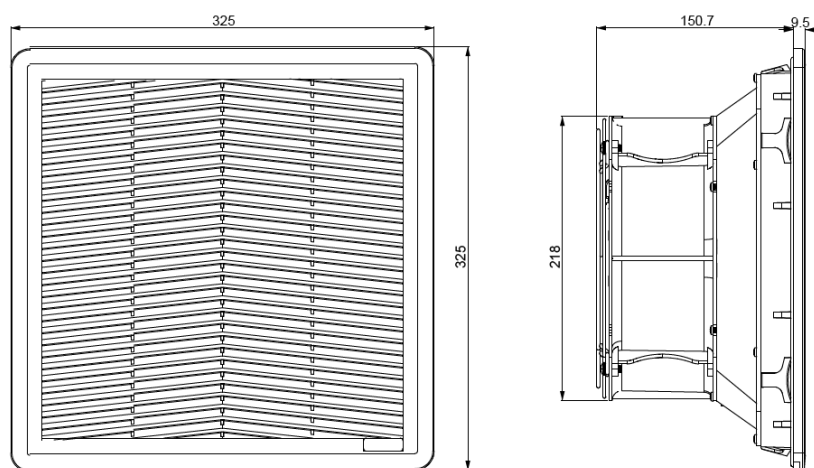


R5KV20115/230

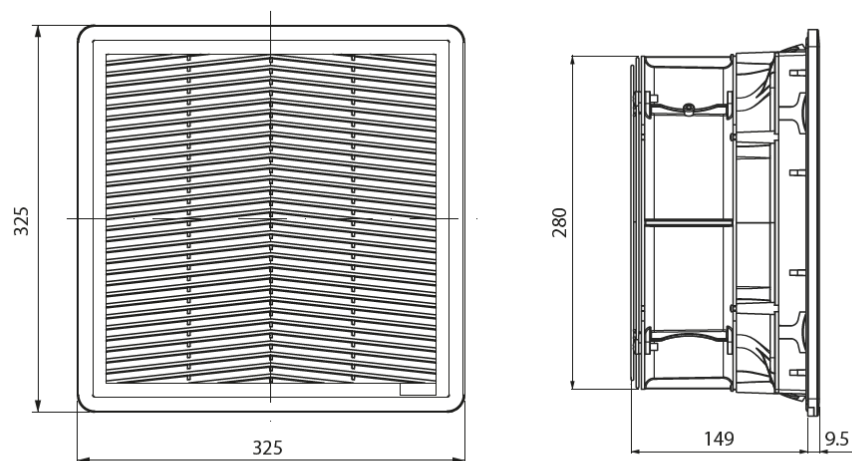

R5KVG20115/230


DIMENSIONI 325X325MM
DIMENSIONS 325X325MM

Specifiche tecniche Technical Specs

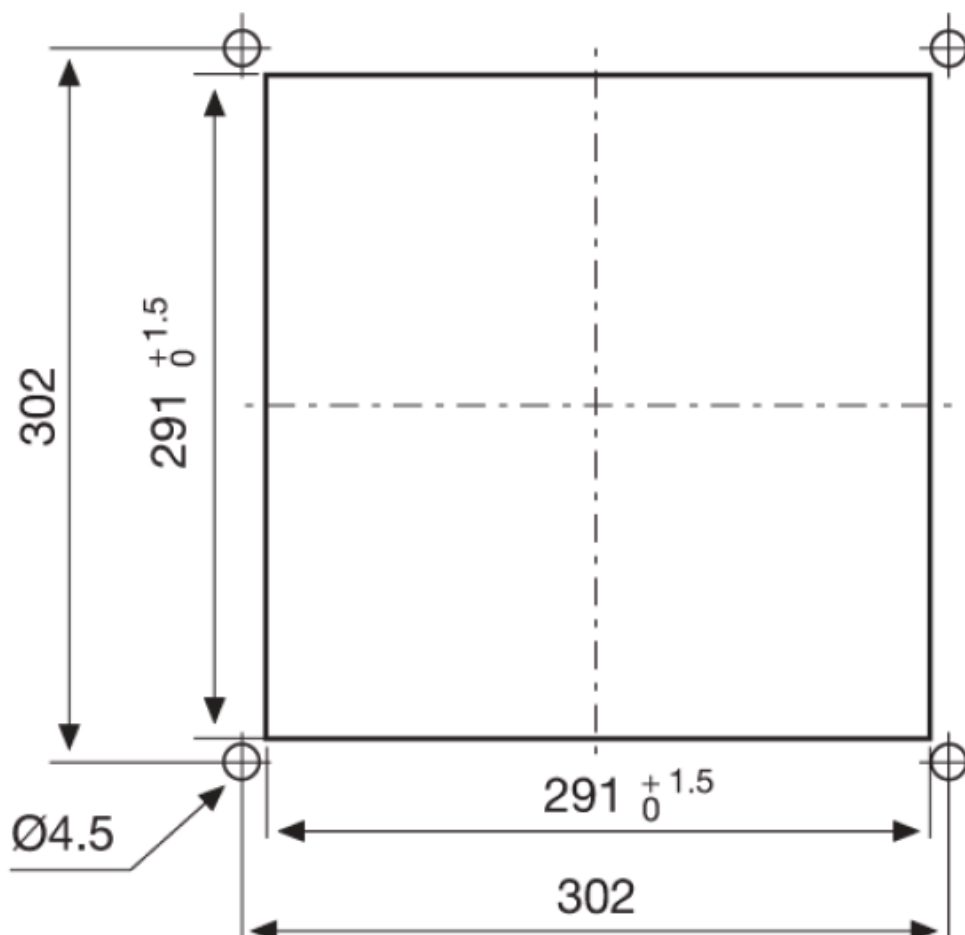


DIMENSIONI 325X325MM
DIMENSIONS 325X325MM

Specifiche tecniche Technical Specs

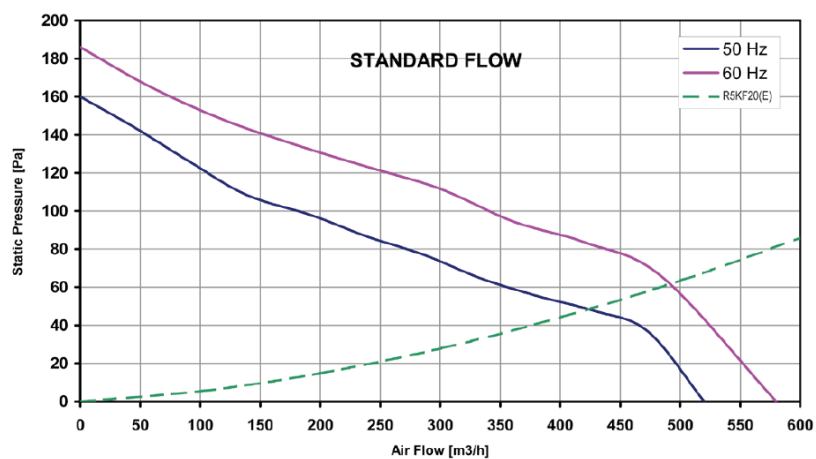

R5KV20115/230

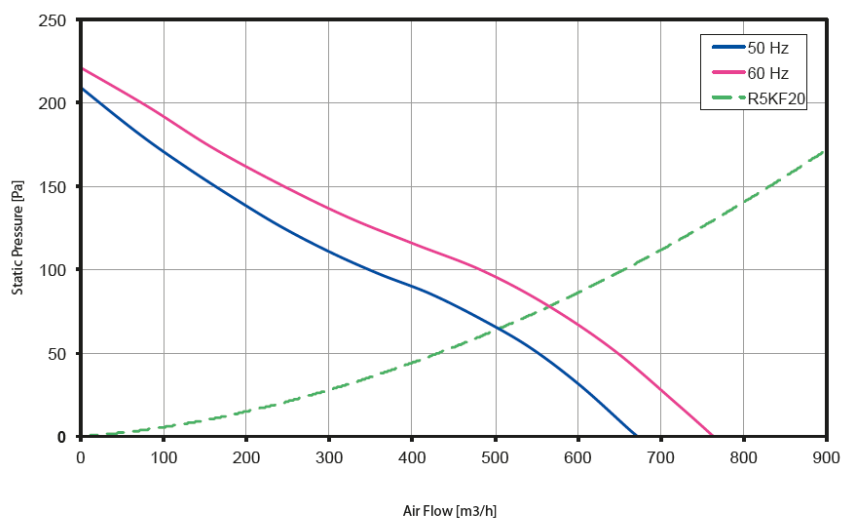

R5KVG20115/230