

■ Condizionatori semi incasso

Semi-recessed coolers



- Guarnizione iniettata lato armadio di serie
 - Evaporatore di condensa integrato.
 - Filtro aria di serie.
 - Colore standard RAL 7035 bct. Altri colori a richiesta.
 - Allacciamento mediante morsettiere PLUG-IN:
 - TOP - 2 connettori alimentazione PLUG-IN. Gestione allarme sovratemperatura a morsettiere. ON/OFF remoto (contatto per interruttore porta). Seriale RS485 per controllo remoto (a richiesta).
 - Tensioni speciali a richiesta.
 - Tutte le versioni bifase e trifase possono essere alimentate a differenti tensioni, mediante la modifica del cablaggio interno (seguire schemi).
 - Campo regolazione temperatura (set di fabbrica) da / a: **+30°C / +40°C**
 - Tipo di refrigerante **R134a**
 - Tipo ciclo di lavoro **100%**
- Injected gasket on cabinet side as standard.
 - Inbuilt condensate evaporator.
 - Standard air filter.
 - Textured RAL 7035 standard color. Other colors are available upon request.
 - The connection is performed by means of PLUG-IN terminal boards:
 - TOP - 2 PLUG-IN power supply connectors. Alarm control by means of a terminal board. Remote ON/OFF. (door micro switch). RS485 serial interface for remote control (on request).
 - Special voltage on request.
 - All two-phase and three-phase versions can be supplied with different voltages, by changing the internal wiring (follow diagrams).
 - Temperature regulating range (factory set) from /to **+30°C / +40°C**
 - Coolant type **R134a**
 - Operating cycle type **100%**

Approvazioni
Approvals

CE EAC

IP54

+20° °C +50°

CODICE CODE	TENSIONE DI ALIMENTAZIONE SUPPLY VOLTAGE	FREQUENZA FREQUENCY Hz	POTENZA FRIGORIFERA REFRIGERATING POWER DIN 3168, W		DISPOSITIVO DI PROTEZIONE PROTECTIVE DEVICE	POTENZA ASSORBITA ABSORPTION W		FLA MASSIMA CORRENTE DI ESERCIZIO FLA FULL LOAD AMPERES	CORRENTE DI SPUNTO STARTING CURRENT	LIVELLO RUMORE NOISE LEVEL dB (A)	PESO WEIGHT Kg
			L35/L35	L35/L50		L35/L35	L35/L50				
R5KLM03021ST	230 Vac - 1 ph	50/60	330	270	4 A	190	220	1,3 A	9 A	61	22
R5KLM05021ST	230 Vac - 1 ph	50/60	520	400	6 A	280	320	2 A	11 A	67	27
R5KLM08021ST	230 Vac - 1 ph	50/60	830	650	6 A	400	450	2,9 A	17 A	67	31
R5KLM10021ST	230 Vac - 1 ph	50/60	1020	820	8 A	490	540	3,7 A	20 A	67	45
R5KLM15021ST	230 Vac - 1 ph	50/60	1420	1140	8 A	660	760	5,2 A	24 A	67	45
R5KLM20021ST	230 Vac - 1 ph	50/60	1960	1570	12 A	930	1070	6 A	26 A	67	52
R5KLM30043ST	400 / 460 Vac - 3 ph	50/60	2800	2240	8 A	1100	1260	2,6 A	12 A	71	79
R5KLM40043ST	400 / 460 Vac - 3 ph	50/60	4000	4200	8 A	1800	2120	3,3 A	15 A	72	82

Opzionale

COLORE SPECIALE = R9KLM...
COVER FRONTALE INOX AISI 304 = RIKLM...
COVER FRONTALE AISI 316 = RI6KLM...




Optional

SPECIAL COLOR = R9KLM...
AISII INOX 304 FRONT COVER = RIKLM...
AISII INOX 316 FRONT COVER = RI6KLM...


■ Condizionatori semi incasso

Semi-recessed coolers


Dimensioni e dime di foratura (mm)
Dimensions and drilling templates (mm)

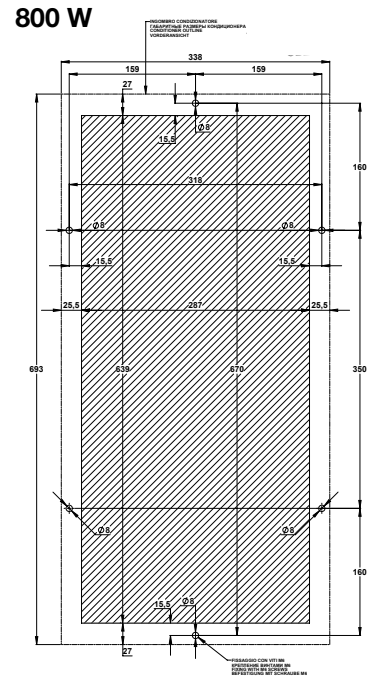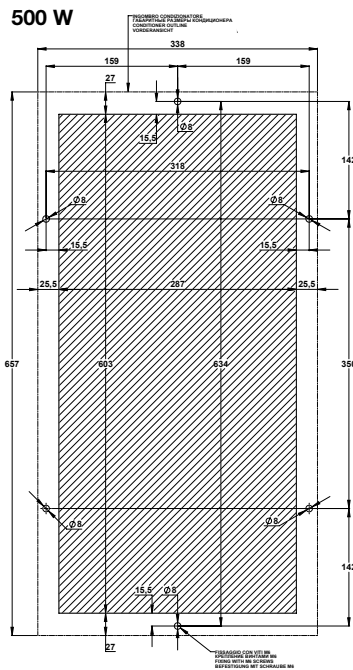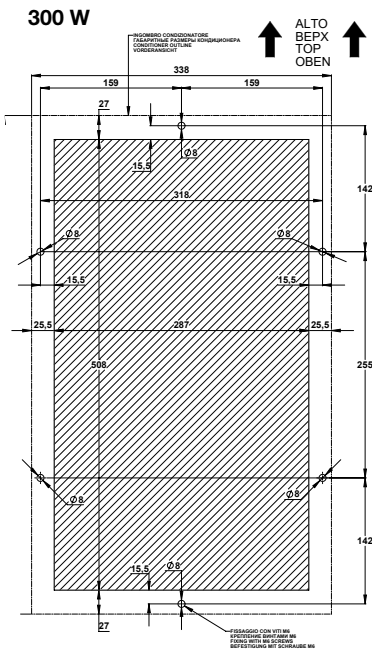

1000 W – 1500 W – 2000 W

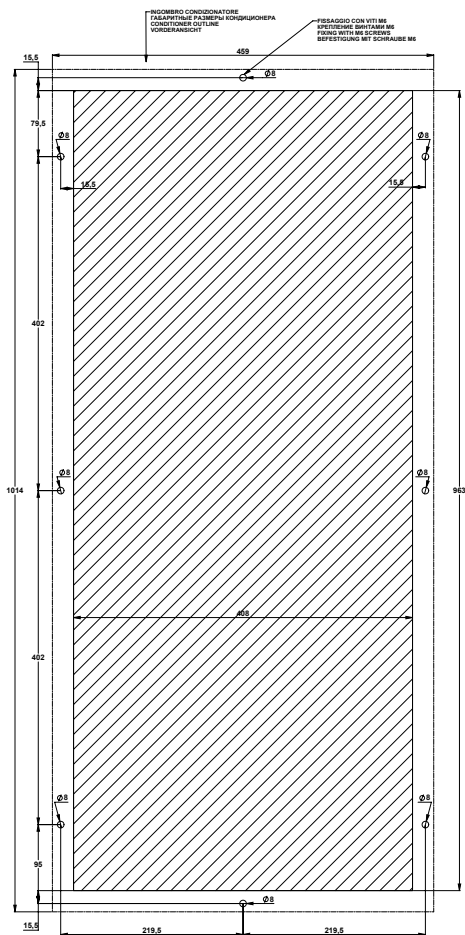

3000 W – 4000 W

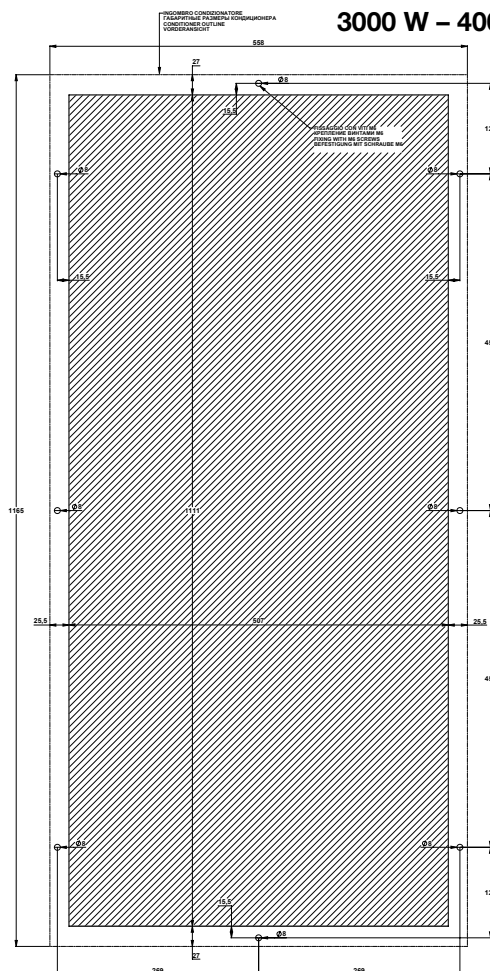

Condizionatori
Coolers