

■ Condizionatori da parete indoor

Wall mounted indoor coolers

6000 W - 400 Vac



- Guarnizione iniettata lato armadio di serie
- Evaporatore di condensa integrato
- Colore standard RAL 7035 bct.
- Allacciamento mediante morsettiere PLUG-IN:
 - 2 connettori alimentazione PLUG-IN. Gestione allarme a morsettiera.
- Griglia filtro di serie.
 - Campo regolazione temperatura (set di fabbrica) da / a: **+30°C / +40°C**
 - Livello di rumore **75 dB (A)**
 - Tipo di refrigerante **R134a**
 - Tipo ciclo di lavoro **100%**
 - Peso **95 kg**
- Injected gasket on cabinet side as standard
- Inbuilt condensate evaporator.
- Textured RAL 7035 standard color.
- The connection is performed by means of PLUG-IN terminal boards:
 - 2 PLUG-IN power supply connectors. Alarm control by means of a terminal board.
- Standard air filter.
 - Temperature regulating range (factory set) from /to **+30°C / +40°C**
 - Noise level **75 dB (A)**
 - Coolant type **R134a**
 - Operating cycle type **100%**
 - Weight **95 Kg**

Approvazioni Approvals

CE EAC

IP54

+20° °C +55°

CODICE CODE	TENSIONE DI ALIMENTAZIONE SUPPLY VOLTAGE	FREQUENZA FREQUENCY Hz	POTENZA FRIGORIFERA REFRIGERATING POWER DIN 3168, W		DISPOSITIVO DI PROTEZIONE PROTECTIVE DEVICE	POTENZA ASSORBITA ABSORPTION W		FLA MASSIMA CORRENTE DI ESERCIZIO FLA FULL LOAD AMPERES	CORRENTE DI SPUNTO STARTING CURRENT
			L35/L35	L35/L50		L35/L35	L35/L50		
R5KLM60043LT	400 Vac - 3 ph 50Hz 460Vac - 3ph 60Hz	50/60	5500/5900	4500/4800	10 A	2300/3200	2600/3500	4,4 / 5,6 A	30 A

Opzionale

COLORE SPECIALE = R9KLM...
COVER FRONTALE INOX AISI 304 = RIKLM...
COVER FRONTALE AISI 316 = RI6KLM...

Optional

SPECIAL COLOR = R9KLM...
AISII INOX 304 FRONT COVER = RIKLM...
AISII INOX 316 FRONT COVER = RI6KLM...


■ Condizionatori da parete indoor

Wall mounted indoor coolers


Potenza frigorifera

Refrigeration power

W 50Hz

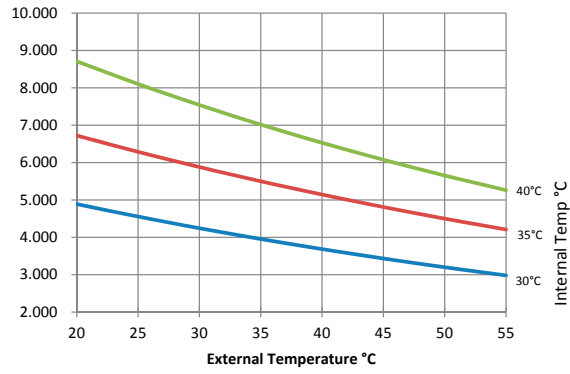

W 60Hz

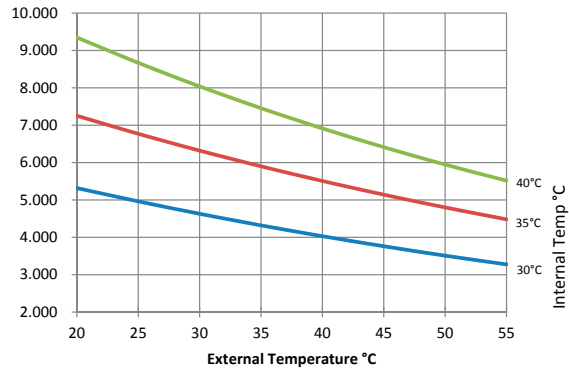

Dimensioni e dime di foratura (mm)

Dimensions and drilling templates (mm)

