

■ Condizionatori Slim

Slim coolers


500 W



- Guarnizione iniettata lato armadio di serie
- Evaporatore di condensa integrato.
- Filtro aria di serie.
- Colore standard RAL 7035 bct. Altri colori a richiesta.
- Allacciamento mediante morsettiera PLUG-IN:
 - 2 connettori alimentazione PLUG-IN. Gestione allarme a morsettiera (allarme sovratemperatura). ON/OFF remoto (contatto per interruttore porta). RS485 a richiesta.
- Campo regolazione temperatura (set di fabbrica) da / a: +30°C / +40°C
- Livello di rumore 67 dB (A)
- Tipo di refrigerante R134a
- Tipo ciclo di lavoro 100%
- Peso 20 kg

- Injected gasket on cabinet side as standard.
- Inbuilt condensate evaporator.
- Standard air filter.
- Textured RAL 7035 standard color. Other colors are available upon request.
- The connection is performed by means of PLUG-IN terminal boards:
 - 2 PLUG-IN power supply connectors. Alarm control by means of a terminal board. Remote ON/OFF (door micro switch). RS485 on request.
- Temperature regulating range (factory set) from / to +30°C / +40°C
- Noise level 67 dB (A)
- Coolant type R134a
- Operating cycle type 100%
- Weight 20 Kg

Approvazioni Approvals



CODICE CODE	VERSIONE. VERSION	TENSIONE DI ALIMENTAZIONE SUPPLY VOLTAGE	FREQUENZA FREQUENCY Hz	POTENZA FRIGORIFERA REFRIGERATING POWER DIN 3168, W L35/L35 L35/L50	DISPOSITIVO DI PROTEZIONE PROTECTIVE DEVICE	POTENZA ASSORBITA ABSORPTION W L35/L35 L35/L50	FLA MASSIMA CORRENTE DI ESERCIZIO FLA FULL LOAD AMPERES L35/L50	CORRENTE DI SPUNTO STARTING CURRENT
R5KLM05021LIT	SLIM IN	230 Vac - 1 ph	50/60	520/550 400/420	6 A	280/330 320/390	2 / 2,2 A	11 A

Opzionale

COLORE SPECIALE = R9KLM...
COVER FRONTALE INOX AISI 304 = RIKLM...
COVER FRONTALE AISI 316 = RI6KLM...

Optional

SPECIAL COLOR = R9KLM...
AISI INOX 304 FRONT COVER = RIKLM...
AISI INOX 316 FRONT COVER = RI6KLM...


■ Condizionatori Slim

Slim coolers


500 W

Potenza frigorifera Refrigeration power

W 50Hz

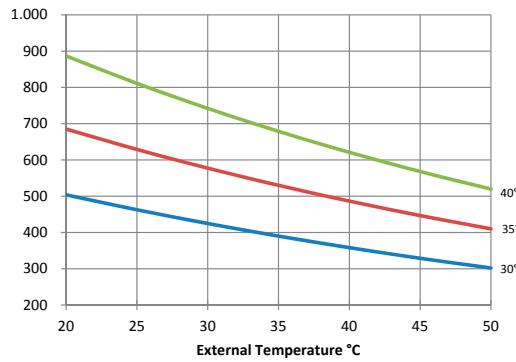

W 60Hz

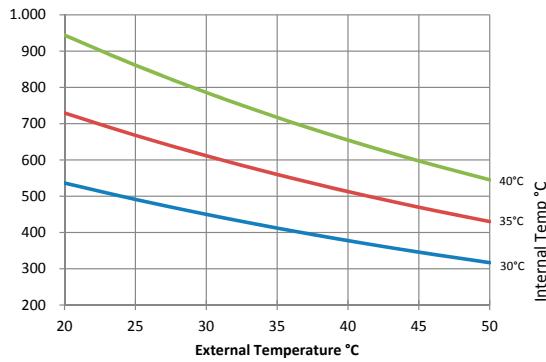

Dimensioni e dime di foratura (mm) Dimensions and drilling templates (mm)

